



AMERICAN WOOD COUNCIL

**115 MPH  
EXPOSURE B**

# **WFCM GUIDE**

**Guide to Wood Frame Construction  
in High Wind Areas  
for One- and Two-Family Dwellings  
2015 EDITION**

## **Updates and Errata**

While every precaution has been taken to ensure the accuracy of this document, errors may have occurred during development. Updates or Errata are posted to the American Wood Council website at [www.awc.org](http://www.awc.org). Technical inquiries may be addressed to [info@awc.org](mailto:info@awc.org).

**The American Wood Council (AWC)** is the voice of North American traditional and engineered wood products. From a renewable resource that absorbs and sequesters carbon, the wood products industry makes products that are essential to everyday life. AWC's engineers, technologists, scientists, and building code experts develop state-of-the-art engineering data, technology, and standards on structural wood products for use by design professionals, building officials, and wood products manufacturers to assure the safe and efficient design and use of wood structural components.



AMERICAN WOOD COUNCIL

**115 MPH  
EXPOSURE B**

**WFCM  
GUIDE**

**Guide to Wood Frame Construction  
in High Wind Areas  
for One- and Two-Family Dwellings**

**2015 EDITION**

Copyright © 2015  
American Wood Council

**Guide to Wood Construction in High Wind Areas for One- and Two-Family Dwellings –  
115 mph Exposure B Wind Zone, Based on the 2015 WFCM**

First Web Version: November 2015

ISBN 978-1-940383-23-1

Copyright © 2015 by American Wood Council

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including, without limitation, electronic, optical, or mechanical means (by way of example and not limitation, photocopying, or recording by or in an information storage retrieval system) without express written permission of the American Wood Council. For information on permission to copy material, please contact:

Copyright Permission  
American Wood Council  
222 Catocin Circle, SE, Suite 201  
Leesburg, VA 20175  
[info@awc.org](mailto:info@awc.org)

Printed in the United States of America



# Table of Contents

<b>1</b>	<b>GENERAL PROVISIONS</b> .....	<b>2</b>
1.1	<b>SCOPE</b> .....	2
	Design Concepts.....	2
1.2	<b>APPLICABILITY</b> .....	4
	Building Height .....	4
	Building Dimension.....	4
	Building Shape.....	4
1.3	<b>FRAMING CONNECTIONS</b> .....	5
<b>2</b>	<b>FOUNDATION ANCHORAGE</b> .....	<b>7</b>
2.1	<b>GENERAL LOADS</b> .....	7
2.2	<b>ANCHOR BOLTS</b> .....	7
2.3	<b>ANCHORAGE AT OPENINGS</b> .....	8
<b>3</b>	<b>FLOORS</b> .....	<b>9</b>
3.1	<b>GENERAL</b> .....	9
3.2	<b>WOOD FLOOR JOIST SYSTEMS</b> .....	9
3.3	<b>WOOD I-JOIST FLOOR SYSTEMS</b> .....	10
3.4	<b>WOOD FLOOR TRUSS SYSTEMS</b> .....	10
3.5	<b>FLOOR SHEATHING</b> .....	10
3.6	<b>FLOOR BRACING</b> .....	10
<b>4</b>	<b>WALLS</b> .....	<b>11</b>
4.1	<b>GENERAL</b> .....	11
4.2	<b>EXTERIOR WALLS</b> .....	11
4.3	<b>EXTERIOR WALL SHEATHING</b> .....	16
<b>5</b>	<b>ROOFS</b> .....	<b>20</b>
5.1	<b>GENERAL</b> .....	20
5.2	<b>WOOD RAFTER SYSTEMS</b> .....	20
5.3	<b>WOOD I-JOIST ROOF SYSTEMS</b> .....	23
5.4	<b>WOOD ROOF TRUSS SYSTEMS</b> .....	23
5.5	<b>ROOF SHEATHING</b> .....	23
5.6	<b>ROOF BRACING ENDWALL</b> .....	23
	<b>GLOSSARY OF TERMS</b> .....	<b>24</b>
	<b>CHECKLIST</b> .....	<b>27</b>

**TABLES**

Table 1. Maximum Building Lengths and Aspect Ratios .....	5
Table 2. General Nailing Schedule .....	6
Table 3. Foundation Anchorage Loads .....	7
Table 4. Anchor Bolt Spacings .....	7
Table 5. Exterior Wall - Maximum Wood Stud Lengths.....	12
Table 6. Top Plate Splices in Exterior Walls .....	13
Table 7. Wall Connections for Exterior Loadbearing Walls .....	13
Table 8. Wall Connections for Endwall Assemblies .....	14
Table 9. Uplift Forces for Two Foot Rake Overhang Framed With Structural Outlookers .....	15
Table 10. Window Sill Plates in Exterior Walls .....	16
Table 11. Headers in Loadbearing Exterior Walls.....	17
Table 12. Percentage of Full-Height Sheathing in Minimum Building Dimension (W) .....	18
Table 13. Percentage of Full-Height Sheathing in Maximum Building Dimension (L).....	19
Table 14. Truss, I-Joist, or Rafter Connections at Loadbearing Walls.....	21
Table 15. Ridge Strap Connections.....	22


**FIGURES**

Figure 1. Master Building Diagram (For Illustrative Purposes Only) .....	3
Figure 2. Mean Roof Height (MRH) and Top Plate to Ridge Height ( $H_R$ ).....	4
Figure 3. Inscribed Building Dimensions.....	4
Figure 4. Building Aspect Ratios .....	5
Figure 5. Anchor Bolts Resisting Uplift, Lateral, and Shear Loads.....	8
Figure 6. Floor Diaphragm Opening Limits.....	9
Figure 7. Setback Limits for Loadbearing Wall or Shear Wall and Limit on Loadbearing Wall Offset from Support .....	9
Figure 8. Cantilever with Loadbearing Wall or Shear Wall .....	10
Figure 9. Floor Bracing.....	10
Figure 10. Maximum Wall and Stud Lengths and Stud Spacing .....	11
Figure 11. Ceiling Bracing for Gable Endwall .....	12
Figure 12. Top Plate Intersection Detail.....	13
Figure 13. Top Plate Splice Length.....	13
Figure 14. Story-to-Story Uplift and Lateral Connections.....	14
Figure 15. Rake Overhang Framed Without Structural Outlookers .....	15
Figure 16. Rake Overhang Framed With Rake Truss.....	15
Figure 17. Rake Overhang Framed With Structural Outlookers .....	15
Figure 18. Framing Around Exterior Wall Openings .....	17
Figure 19a. Corner Stud Hold Down Detail – 3 Studs with Blocking.....	18
Figure 19b. Corner Stud Hold Down Detail – 4 Studs .....	19
Figure 20. Roof Systems .....	20
Figure 21. Ridge Strap Connection Detail.....	22

# Introduction

The purpose of this *Guide to Wood Construction in High Wind Areas: 115 MPH Exposure B Wind Zone (Guide)* is to simplify the construction and design of wood frame buildings in areas where design wind velocity requirements do not exceed 115 miles per hour Exposure Category B. This Guide is in compliance with the building code-referenced ANSI/AWC 2015 *Wood Frame Construction Manual (WFCM) for One- and Two-Family Dwellings*. Accordingly, any designs in compliance with this Guide should also be in full compliance with the *WFCM*. The provisions of this Guide focus on ensuring structural integrity for resisting wind loads. This Guide does not specifically address other loading conditions such as those created by live, seismic (earthquake), snow, or flood loads. These additional loading conditions must be considered as required by the building code and are addressed in the *WFCM*.

The information in this Guide offers information to architects, builders, designers, code officials, instructors and others interested in simplified design. It is not the intent of this Guide to instruct on all aspects or techniques of proper framing or design. In developing the provisions of this Guide using provisions of the *WFCM*, the most reliable data available from laboratory tests and experience with structures in service have been carefully analyzed and evaluated for the purpose of providing a consistent standard of practice. It is intended that this document be used in conjunction with competent engineering design, accurate fabrication, and adequate supervision of construction. Therefore, AWC does not assume any responsibility for errors or omissions in this Guide, the *WFCM*, nor for engineering designs or plans prepared from it.

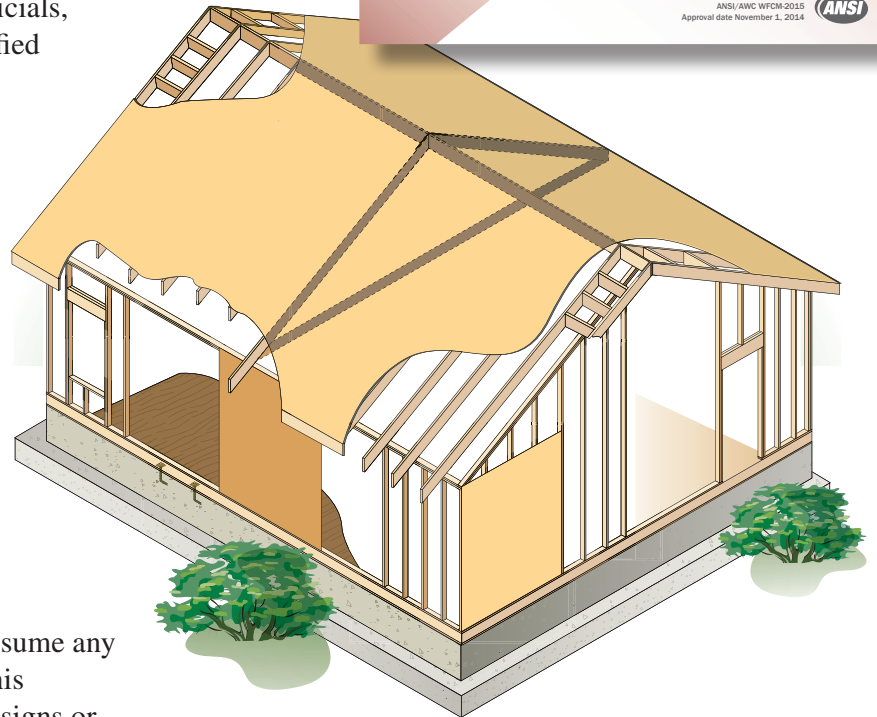

# 1 General Provisions

## 1.1 SCOPE

*This Guide to Wood Construction in High Wind Areas: 115 MPH Exposure B Wind Zone (Guide)* establishes a specific set of prescriptive, wind-resistive structural requirements for one- and two-family wood-frame residential buildings of sizes and shapes specified in the “Applicability” section (1.2) of this chapter. The provisions of this Guide are directed toward ensuring structural integrity for resisting wind loads. In addition, provisions of this Guide are derived from the wind provisions found in the ANSI/AWC 2015 *Wood Frame Construction Manual (WFCM) for One- and Two-Family Dwellings*.

Wind load requirements of this Guide are based on 115 mile per hour, 3-second-gust wind speeds for Exposure B locations.

Structural elements not complying with the conditions contained in this Guide shall be designed in accordance with the *WFCM* or the governing building code.


The provisions of this Guide are not intended to preclude the use of other materials or methods of construction. When alternative methods or materials are used, design loads and capacities shall be determined in accordance with the *WFCM* or the governing building code.

Tabulated values in this Guide shall be permitted to be interpolated unless otherwise noted in the applicable table footnotes.

### Design Concepts

This Guide relies on the following concepts:

- Roofs, ceilings and floors are designed as diaphragms, which receive lateral loads from roof and exterior walls (assuming the wind blowing from any direction) and transfer these loads to shear walls.
- Exterior walls are designed to resist wind forces and transfer the lateral forces to diaphragms. Exterior walls, foundations, and connections shall be designed to resist lateral and uplift loads received from the roof by means of a continuous load path. Exterior walls are designed to resist wind loads assuming flexible finishes.
- Except for openings, exterior walls are designed as entirely sheathed with wood structural panels including areas above and/or below openings.
- Openings shall not exceed nominal 6'-8" in height.
  - Exception: Opening heights of up to 8' shall be permitted when 5% is added to the percent full-height sheathing requirements in Tables 12 and 13.
- The tabulated wind requirements in this document are based on fully enclosed buildings where openings are designed for the appropriate wind loads. Where required by the governing building code, protection of openings shall be provided to maintain a fully enclosed building envelope.
- The foundation provisions specified in this Guide are limited to the attachment of the building to the foundation. An adequate foundation system shall be provided to resist all required loads. Engineered and prescriptive design of the foundation for gravity, lateral, and uplift loads, including uplift and hold down anchorage, shall be provided in accordance with the governing building code.

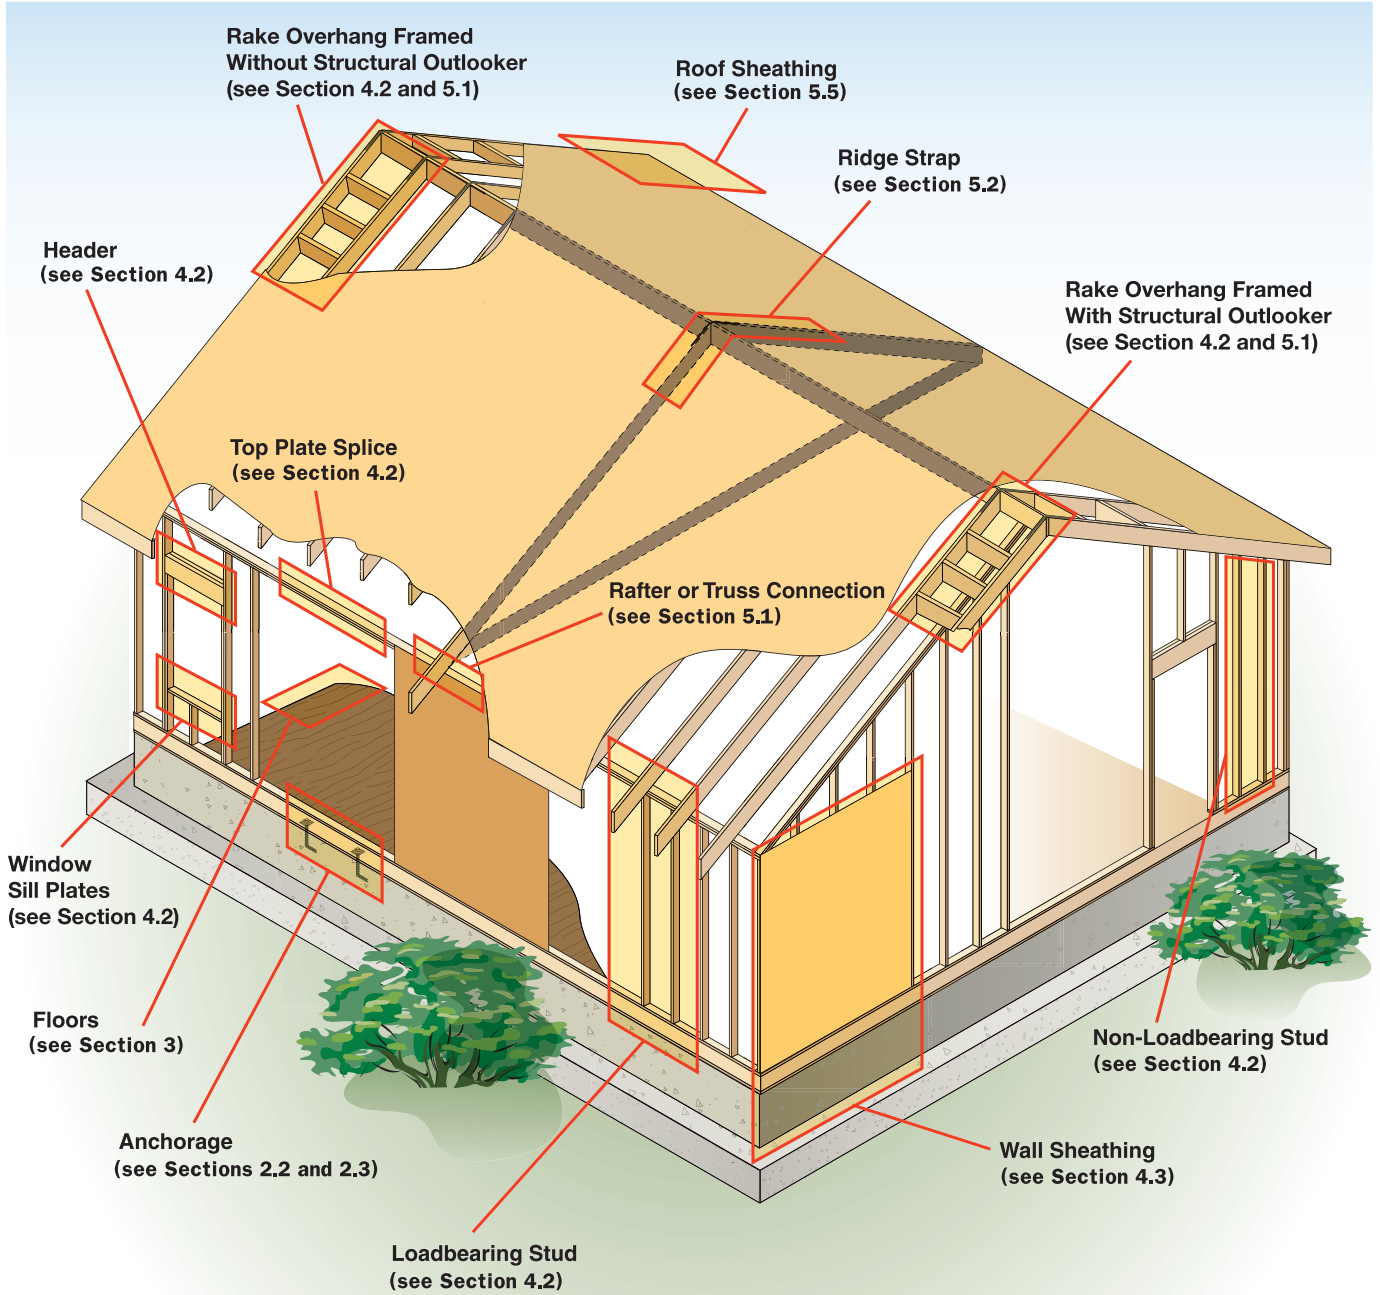

**NOTE**

**Continuous Load Path.** The interconnection of all framing elements is critical to a wind-resistant building. A continuous load path of interconnected framing elements from footings and foundation walls to floors, walls, and roof framing shall be provided.

Figure 1. Master Building Diagram (For Illustrative Purposes Only)

## 1.2 APPLICABILITY

### Building Height

The building shall not exceed two stories or a mean roof height of 33 feet, measured from average grade to average roof elevation (See Figure 2). The maximum top plate to ridge height ( $H_R$ ) shall not exceed 10 feet.

### Building Dimension

- The maximum building dimension ( $L$ ) shall not be greater than 80 feet.
- The minimum building dimension ( $W$ ) shall not be greater than 80 feet.
- The maximum span (horizontal projection) of the roof trusses or rafters covered under the scope of this Guide are limited to 36 feet; however, combinations of these systems can be used for a total inscribed dimension of 80 feet.

### Building Shape

- **Rectangular Buildings.** Design provisions in this Guide assume that buildings are rectangular in shape. Walls shall be permitted to be offset by a maximum of 4 ft. (such as projecting bays, inset porches, or other irregular shapes) without requiring detailing.
- **Non-rectangular Buildings.** In this Guide, non-rectangular buildings are designed as a rectangular building with dimensions that inscribe the non-rectangular building for purposes of determining lateral resistance requirements (See Figure 3).
  - The longest inscribed building dimension shall be assumed to be the building length,  $L$ , and the shortest inscribed building dimension shall be assumed to be the building width,  $W$ .
  - The maximum building length and corresponding aspect ratios are shown in Table 1 and Figure 4.
  - The required length of full-height exterior sheathing in Section 4.3 is to be distributed in each shear wall line in proportion to the segment length divided by the overall building dimension. Hold downs shall be placed at each end of each shear wall line.
  - For conditions where non-rectangular buildings must be designed as separate structures joined at common walls, the *WFCM* should be used.

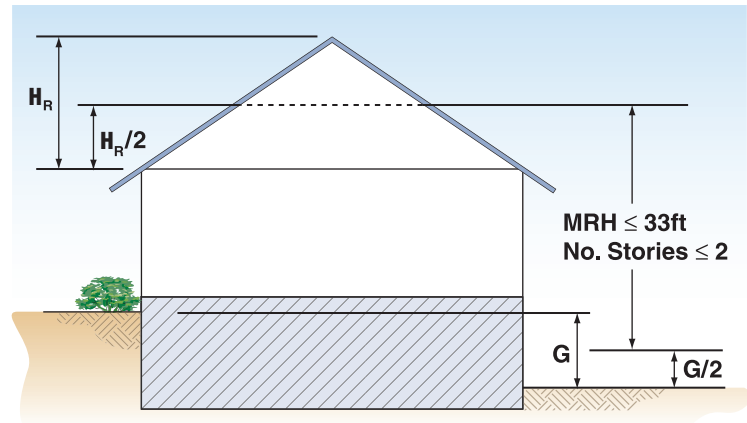


Figure 2. Mean Roof Height (MRH) and Top Plate to Ridge Height ( $H_R$ )

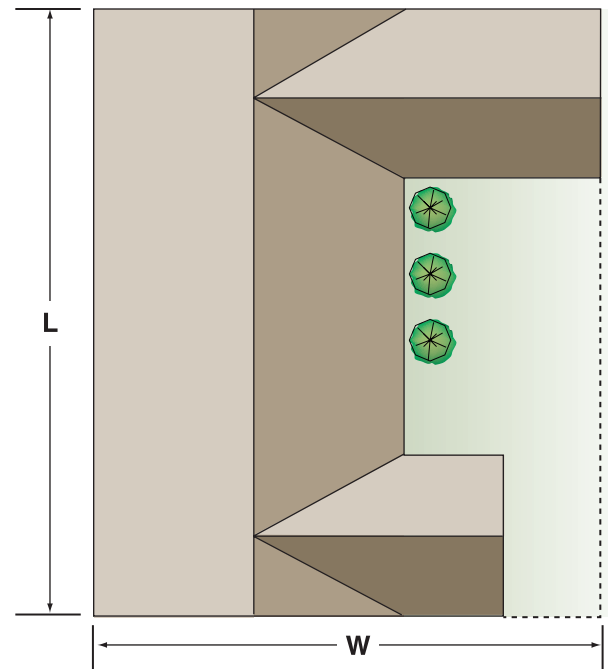


Figure 3. Inscribed Building Dimensions



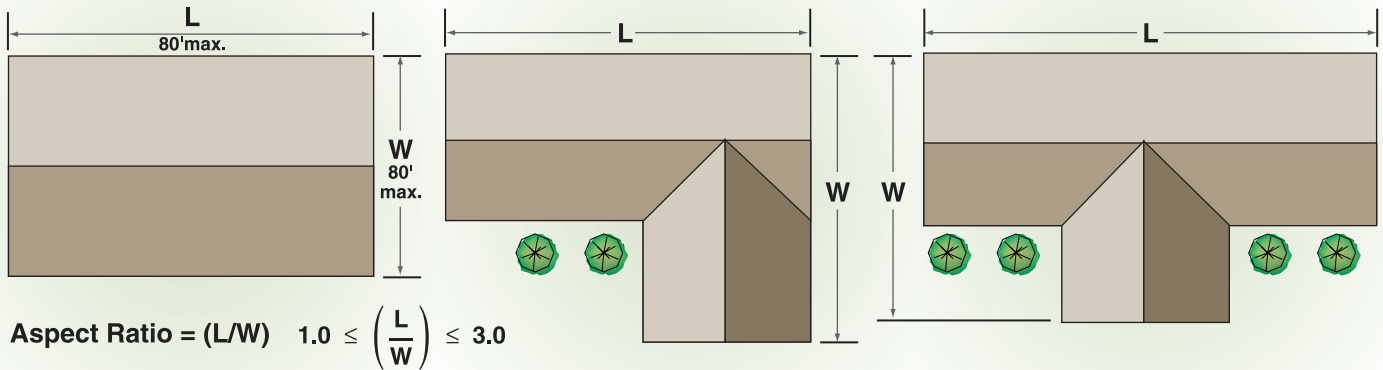


Figure 4. Building Aspect Ratios

Table 1. Maximum Building Lengths and Aspect Ratios

Building Width, W (ft.)	Building Aspect Ratio (L/W)								
	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00
	Maximum Building Length, L (ft.) <sup>1</sup>								
12	12	15	18	21	24	27	30	33	36
16	16	20	24	28	32	36	40	44	48
20	20	25	30	35	40	45	50	55	60
24	24	30	36	42	48	54	60	66	72
28	28	35	42	49	56	63	70	77	80
32	32	40	48	56	64	72	80	—	—
36	36	45	54	63	72	80	—	—	—
40	40	50	60	70	80	—	—	—	—
50	50	62	75	80	—	—	—	—	—
60	60	75	80	—	—	—	—	—	—
70	70	80	—	—	—	—	—	—	—
80	80	—	—	—	—	—	—	—	—

<sup>1</sup> Building dimensions and aspect ratios may be further limited by shear wall lengths. See Table 12.

### 1.3 FRAMING CONNECTIONS

General framing connections shall be in accordance with the requirements of Table 2. Specific connections required for wind-resistant construction are provided with the assembly descriptions in other sections of this Guide. Where more restrictive connection requirements exist in the building code for other loading conditions, such as for gravity or seismic resistance, they shall apply.

Table 2. General Nailing Schedule

Joint Description	Number of Common Nails	Number of Box Nails	Nail Spacing
<b>Roof Framing</b>			
Blocking to Rafter (Toe-nailed)	2- 8d	2-10d	each end
Rim Board to Rafter (End-nailed)	2-16d	3-16d	each end
<b>Wall Framing</b>			
Top Plates at Intersections (Face-nailed)	4-16d	5-16d	at joints
Stud to Stud (Face-nailed)	2-16d	2-16d	24" o.c.
Header to Header (Face-nailed)	16d	16d	16" o.c. along edges
<b>Floor Framing</b>			
Joist to Sill, Top Plate or Girder (Toe-nailed) (Fig. 14)	4- 8d	4-10d	each end
Blocking to Joist (Toe-nailed)	2- 8d	2-10d	each end
Blocking to Sill or Top Plate (Toe-nailed)	3-16d	4-16d	each block
Ledger Strip to Beam or Girder (Face-nailed)	3-16d	4-16d	each joist
Joist on Ledger to Beam (Toe-nailed)	3- 8d	3-10d	each end
Band Joist to Joist (End-nailed) (Fig. 14)	3-16d	4-16d	each end
Band Joist to Sill or Top Plate (Toe-nailed) (Fig. 14)	2-16d	3-16d	per foot
<b>Roof Sheathing</b>			
Wood Structural Panels			
rafters or trusses spaced up to 16" o.c.	8d	10d	6" edge / 6" field
rafters or trusses spaced over 16" o.c.	8d	10d	4" edge / 4" field
gable endwall rake or rake truss w/o gable overhang	8d	10d	6" edge / 6" field
gable endwall rake or rake truss w/ structural outlookers	8d	10d	6" edge / 6" field
gable endwall rake or rake truss w/ lookout blocks	8d	10d	4" edge / 4" field
<b>Ceiling Sheathing</b>			
Gypsum Wallboard	5d coolers	-	7" edge / 10" field
<b>Wall Sheathing</b>			
Wood Structural Panels			
studs spaced up to 24" o.c.	8d	10d	6" edge / 12" field
1/2" and 25/32" Fiberboard Panels	8d <sup>1</sup>	-	3" edge / 6" field
1/2" Gypsum Wallboard	5d coolers	-	7" edge / 10" field
<b>Floor Sheathing</b>			
Wood Structural Panels			
1" or less	8d	10d	6" edge / 12" field
greater than 1"	10d	16d	6" edge / 6" field

<sup>1</sup> Corrosion resistant 11 gage roofing nails and 16 gage staples are permitted, check IBC for additional requirements.

**Nails.** Unless otherwise stated, sizes given for nails are common wire sizes. Box and pneumatic nails of equivalent diameter and equal or greater length to the specified common nails may be substituted unless otherwise prohibited.



## 2 Foundation Anchorage

### 2.1 GENERAL LOADS

The structure shall be anchored to the foundation system to resist the loads in Table 3 and to comply with the hold down requirements in Section 4.3. For pile and girder foundation systems or pier and beam foundation systems that support the floor joists on top of the girder or beam, the Stemwall Foundation loads in Table 3 shall be used. When the floor joists are hung on the sides of the girder or beam with proprietary joist hangers, the Slab-on-Grade loads in Table 3 shall be used. Ledgers are not permitted.

Table 3. Foundation Anchorage Loads

Raised-Floor Foundation Supporting:	Uplift <sup>1</sup> (plf)	Lateral (plf)	Stemwall Foundations <sup>2</sup>									Slab-on-Grade Foundations <sup>3</sup>
			Building Aspect Ratio (L/W)									
			1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	
			Shear (plf)									
Roof, Ceiling, and One Floor	47	87	147	184	221	258	294	331	368	405	441	730
Roof, Ceiling, and Two Floors	-	87	221	277	332	387	442	498	553	608	663	730

<sup>1</sup> For non-loadbearing walls, uplift connections need not exceed 60 plf.

<sup>2</sup> Shear connection requirements in the maximum building dimension (L) need not exceed the tabulated values for L/W=1.00.

<sup>3</sup> Shear connection requirements are based on a required sheathing nail spacing of 3" o.c. in Tables 12 and 13. For reduced wood structural panel sheathing nailing requirements of 4" and 6" o.c. the shear loads can be reduced to the Bottom Plate-to-Frame Shear Connection provided in Tables 12 and 13.

### 2.2 ANCHOR BOLTS



Where 5/8" anchor bolts are used to resist uplift, lateral, and shear loads provided in Table 3, the anchor bolts shall be installed per Table 4 using 3" x 3" x 1/4" plate washers (See Figure 5).

Table 4. Anchor Bolt Spacings



Raised-Floor Foundation Supporting:	Stemwall Foundations with 2x6 Sill Plates <sup>1</sup>									Slab-on-Grade Foundations
	Building Aspect Ratio (L/W)									
	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	
	5/8" Anchor Bolt Spacing (in.)									
Roof, Ceiling, and One Floor	72	72	72	72	63	56	50	46	42	24
Roof, Ceiling, and Two Floors	72	67	56	48	42	37	33	30	28	24

<sup>1</sup> The anchor bolt spacing in the maximum building dimension (L) need not be less than the tabulated spacing for L/W=1.00.

**Concrete Basement or Stemwall Foundation**

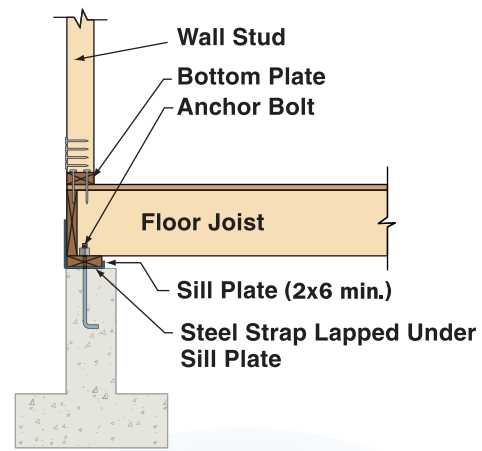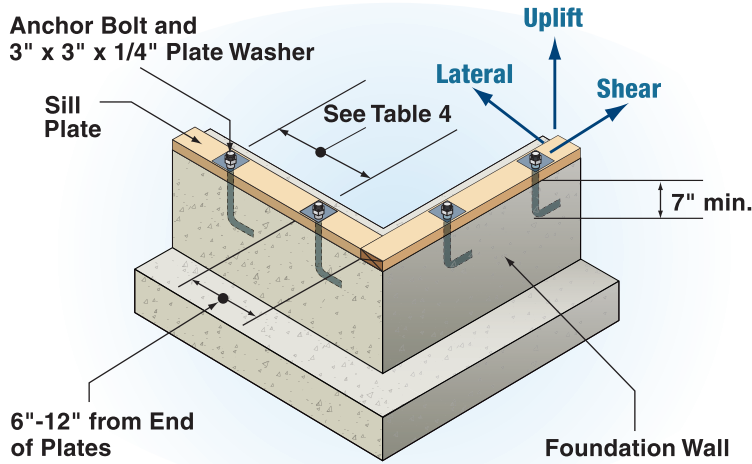

**Concrete Masonry Unit Basement or Stemwall Foundation**

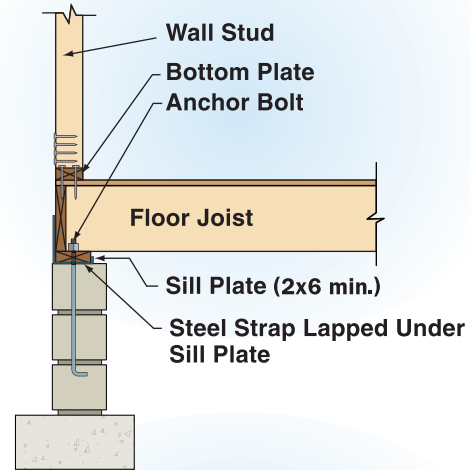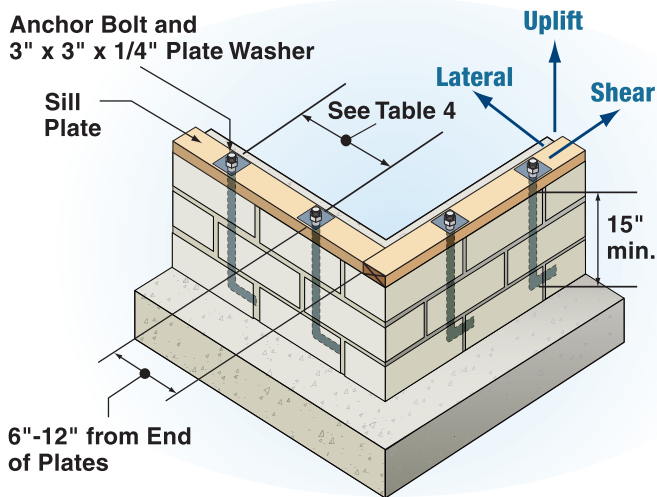

**Slab-On-Grade Foundation**

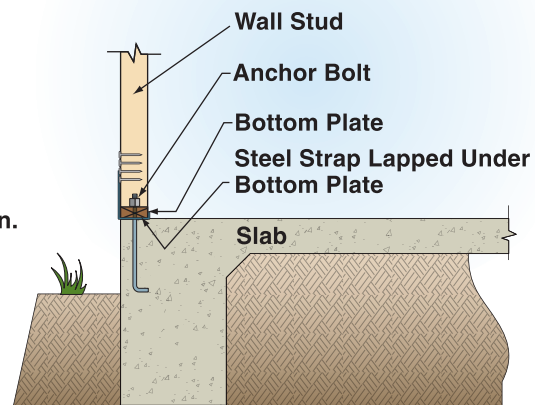
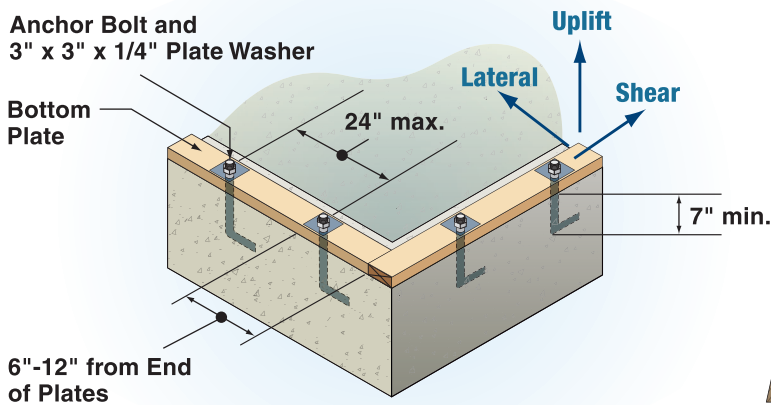


Figure 5. Anchor Bolts Resisting Uplift, Lateral, and Shear Loads.


**2.3 ANCHORAGE AT OPENINGS**

Additional anchorage shall be installed on each side of any exterior wall opening that contains a header that resists wind loads (see Figure 18). The anchorage shall resist the loads in Table 11.

## 3 Floors

### 3.1 GENERAL

- Framing Member Span.** Single spans of floor framing members shall not exceed 26 feet.
- Floor Openings.** Floor openings shall not exceed the lesser of 12 feet or 50% of the building dimension (See Figure 6).

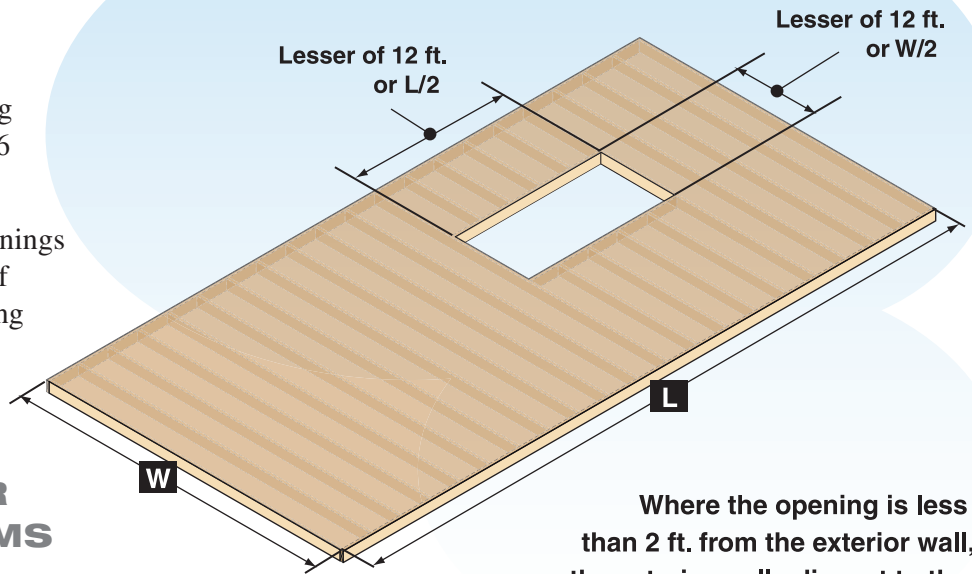

Where the opening is less than 2 ft. from the exterior wall, the exterior wall adjacent to the opening shall be framed using full height studs

### 3.2 WOOD FLOOR JOIST SYSTEMS

- Floor Joists.** Floor joists shall be sized in accordance with the governing building code.
- Floor Joists That Support Loadbearing Walls.** Loadbearing walls parallel to joists shall be directly supported by beams, girders, or other loadbearing walls. Loadbearing walls perpendicular to joists shall not be offset from supporting girders, beams, or other loadbearing walls by more than the depth of the joists (See Figure 7).
- Cantilevered Floor Joists.** Lumber joists shall be located directly over studs except at beams and headers.

Figure 6. Floor Diaphragm Opening Limits

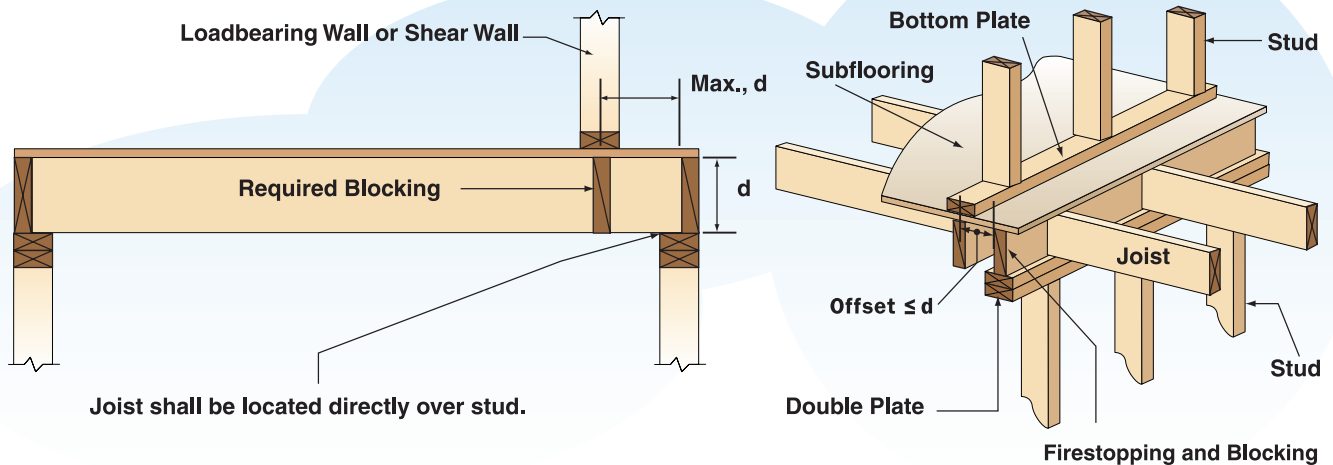


Figure 7. Setback Limits for Loadbearing Wall or Shear Wall and Limit on Loadbearing Wall Offset from Support

- **Cantilevered Floor Joists that Support Loadbearing or Shear Wall.** Overhang lengths of cantilevered floor joists supporting a loadbearing or shear wall at the end of the cantilever shall be limited to the depth,  $d$ , of the joists (See Figure 8).

### 3.3 WOOD I-JOIST FLOOR SYSTEMS

Wood I-joist floor systems shall comply with requirements set forth in the manufacturer's code evaluation report.

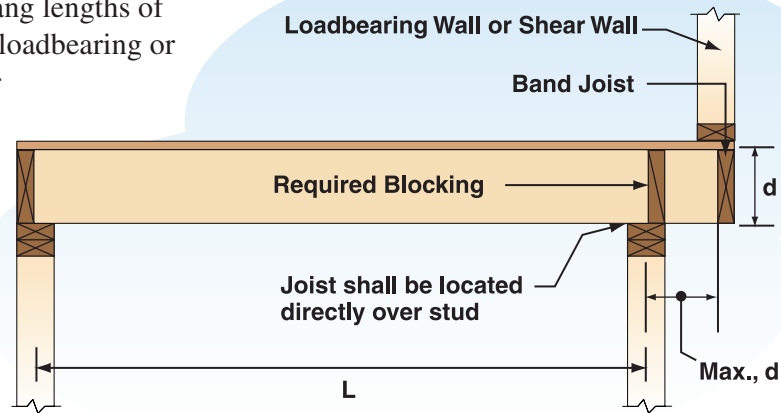


Figure 8. Cantilever with Loadbearing Wall or Shear Wall

### 3.4 WOOD FLOOR TRUSS SYSTEMS

Wood floor truss systems shall be manufactured and installed in accordance with *ANSI/TPI 1 National Design Standard for Metal Plate Connected Wood Truss Construction*, the truss design drawings, and/or the manufacturer's code evaluation report.

### 3.5 FLOOR SHEATHING

Floors shall be sheathed in accordance with the governing building code.

### 3.6 FLOOR BRACING

Blocking and connections shall be provided at panel edges perpendicular to floor framing members in the first two truss or joist spaces and shall be spaced at a maximum of 4 feet on center (See Figure 9). Nailing requirements are given in Table 2.

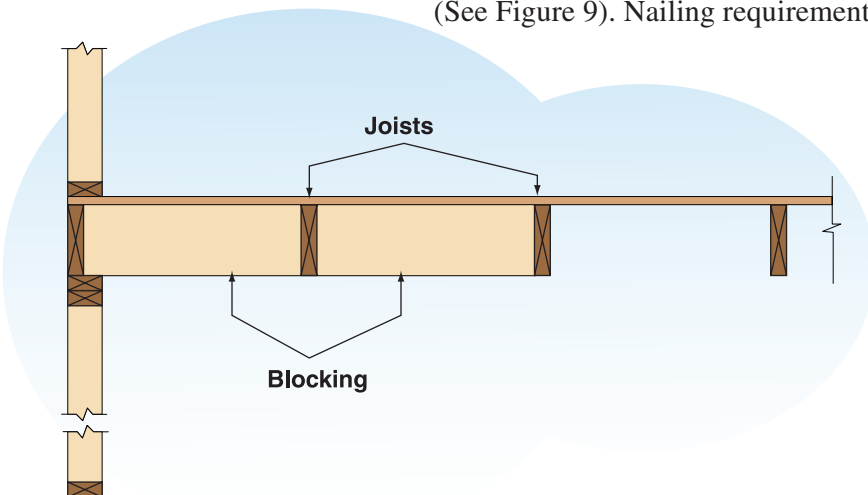


Figure 9. Floor Bracing

## 4 Walls

### 4.1 GENERAL

- **Wall Heights.** Loadbearing walls shall not exceed 10 feet in height. Non-loadbearing walls shall not exceed 20 feet in height (See Figure 10 and Table 5).
- **Wall Stud Spacing.** Wall stud spacing shall not exceed 24 inches on center (See Figure 10 and Table 5).
- **Wall Story Offsets.** Upper story wall segments shall not be offset from lower story wall segments by more than the depth,  $d$ , of the floor framing members (See Figures 7 and 8).

### 4.2 EXTERIOR WALLS

- **Wood Studs.** Where exterior walls are fully sheathed with wood structural panels and are covered with flexible finish materials, exterior wall studs of #2 or Stud grade lumber (including Douglas Fir-Larch, Hem Fir, Southern Pine, and Spruce-Pine-Fir) shall not exceed the maximum lengths specified in Table 5 (See Figure 10). Where exterior walls are not fully sheathed with wood structural panels or are covered with brittle materials, additional design options are provided in the WFCM.
- **Stud Continuity.** Studs shall be continuous between horizontal supports, including but not limited to: headers, girders, floor diaphragm assemblies, ceiling diaphragm assemblies, and roof diaphragm assemblies. Studs in gable endwalls adjacent to cathedral ceilings shall be continuous from the uppermost floor to the ceiling diaphragm or to the roof diaphragm.
- **Bracing Gable End Walls.** When attic floor or ceiling assemblies are used to brace gable endwalls, the assemblies shall extend from the endwall for a distance of at least  $1/3$  of the building width when using wood structural panels and for a distance of at least 90% of the building width when using gypsum wallboard ceilings. Sheathing and fasteners shall be as specified in Table 2 and Figure 11.
- **Top Plates.** Double top plates shall be provided at the top of all exterior stud walls. The double plates shall overlap at corners and at intersections with other exterior or interior loadbearing walls (See Figure 12). Double top plates shall be lap-spliced with end joints offset in accordance with the minimum requirements given in Table 6 (See Figure 13).

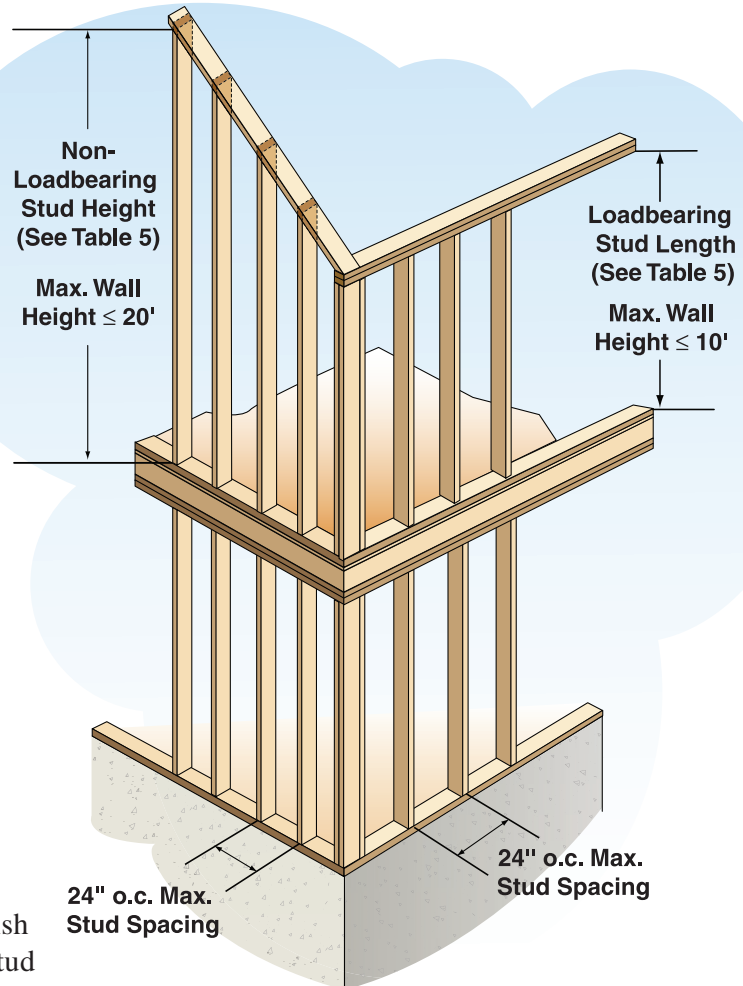


Figure 10. Maximum Wall and Stud Lengths and Stud Spacing

115 MPH EXPOSURE B WIND ZONE

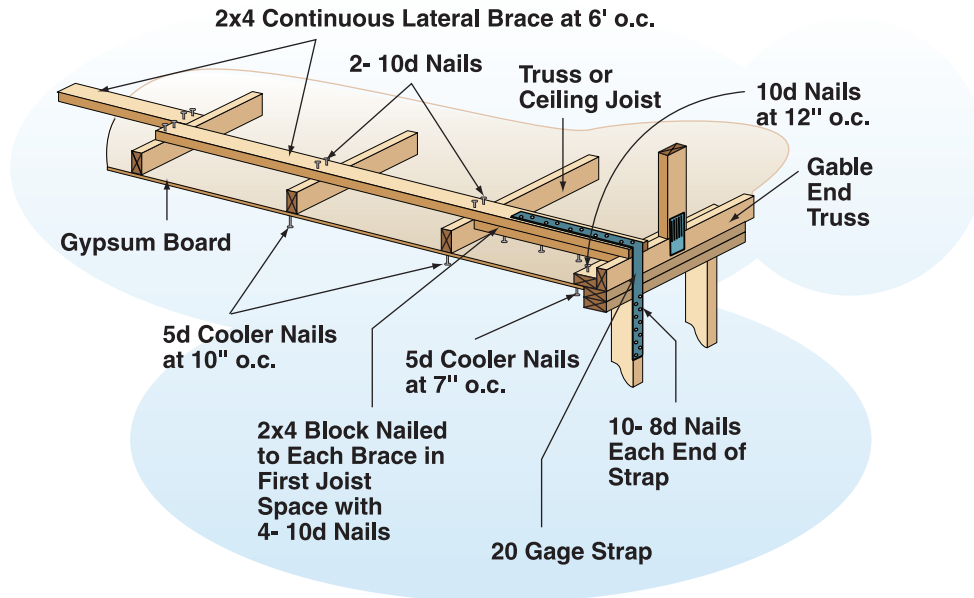


Figure 11. Ceiling Bracing for Gable Endwall

Table 5. Exterior Wall - Maximum Wood Stud Lengths

		2x4		2x6		2x8	
		Grade					
		#2	Stud	#2	Stud	#2	Stud
Exterior Studs	Stud Spacing	Maximum Stud Length					
Non-Loadbearing Studs	12" o.c.	12' - 9"	12' - 5"	20' - 0"	19' - 10"	20' - 0"	20' - 0"
	16" o.c.	11' - 6"	11' - 2"	18' - 6"	17' - 1"	20' - 0"	20' - 0"
	24" o.c.	10' - 0"	9' - 0"	16' - 0"	13' - 9"	20' - 0"	17' - 7"
Loadbearing Studs Supporting Roof and Ceiling Only	12" o.c.	9' - 9"	9' - 9"	9' - 9"		9' - 9"	
	16" o.c.	9' - 9"	9' - 9"				
	24" o.c.	9' - 9"	9' - 0"				
Loadbearing Studs Supporting Roof, Ceiling, and 1 Floor Only	12" o.c.	9' - 9"	9' - 9"	9' - 9"		9' - 9"	
	16" o.c.	9' - 9"	9' - 9"				
	24" o.c.	NP					

NP= Not Permitted

Figure 12. Top Plate Intersection Detail

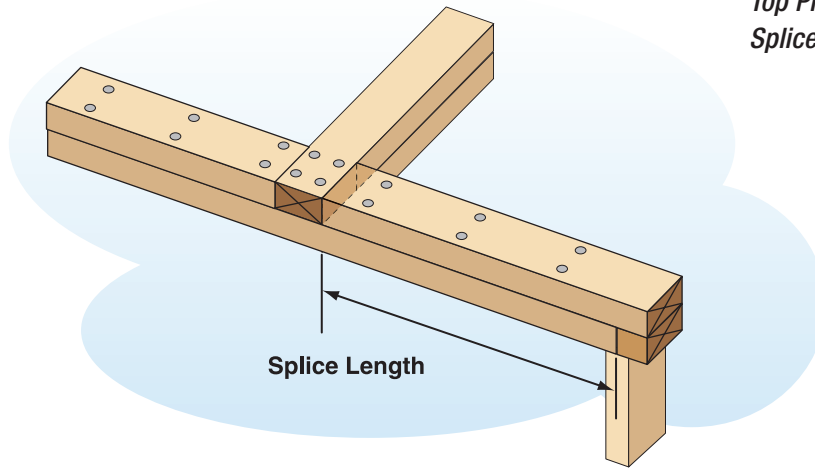


Figure 13. Top Plate Splice Length

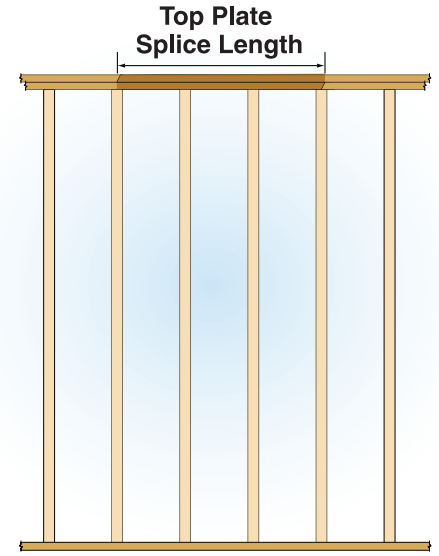


Table 6. Top Plate Splices in Exterior Walls

Building Dimension of Wall Containing Top Plate Splice (ft.)												
Splice Length (ft.)	12	16	20	24	28	32	36	40	50	60	70	80
	Number of 16d Common Nails per Each Side of Splice											
2	5	6	8	NP	NP	NP	NP	NP	NP	NP	NP	NP
4	5	6	8	10	11	13	14	16	NP	NP	NP	NP
6	5	6	8	10	11	13	14	16	20	24	NP	NP
8	5	6	8	10	11	13	14	16	20	24	28	32

NP= Not Permitted

- Wall Assembly to Wall Assembly Connections.** Story-to-story connections from upper story to lower story exterior wall studs shall be in accordance with the requirements of Table 7 (See Figure 14). When upper story wall studs are not located directly above lower story wall studs, the studs shall be attached to a common member in the floor assembly with connections in accordance with Table 7.

Table 7. Wall Connections for Exterior Loadbearing Walls

Stud Spacing	Roof Framing Span (ft.)							Lateral No. of 16d Common Nails (Endnailed)
	12	16	20	24	28	32	36	
	Uplift (lb.)							
12" o.c.	–	–	4	14	24	34	45	2
16" o.c.	–	–	5	19	32	45	60	2
24" o.c.	–	–	8	28	48	68	90	2



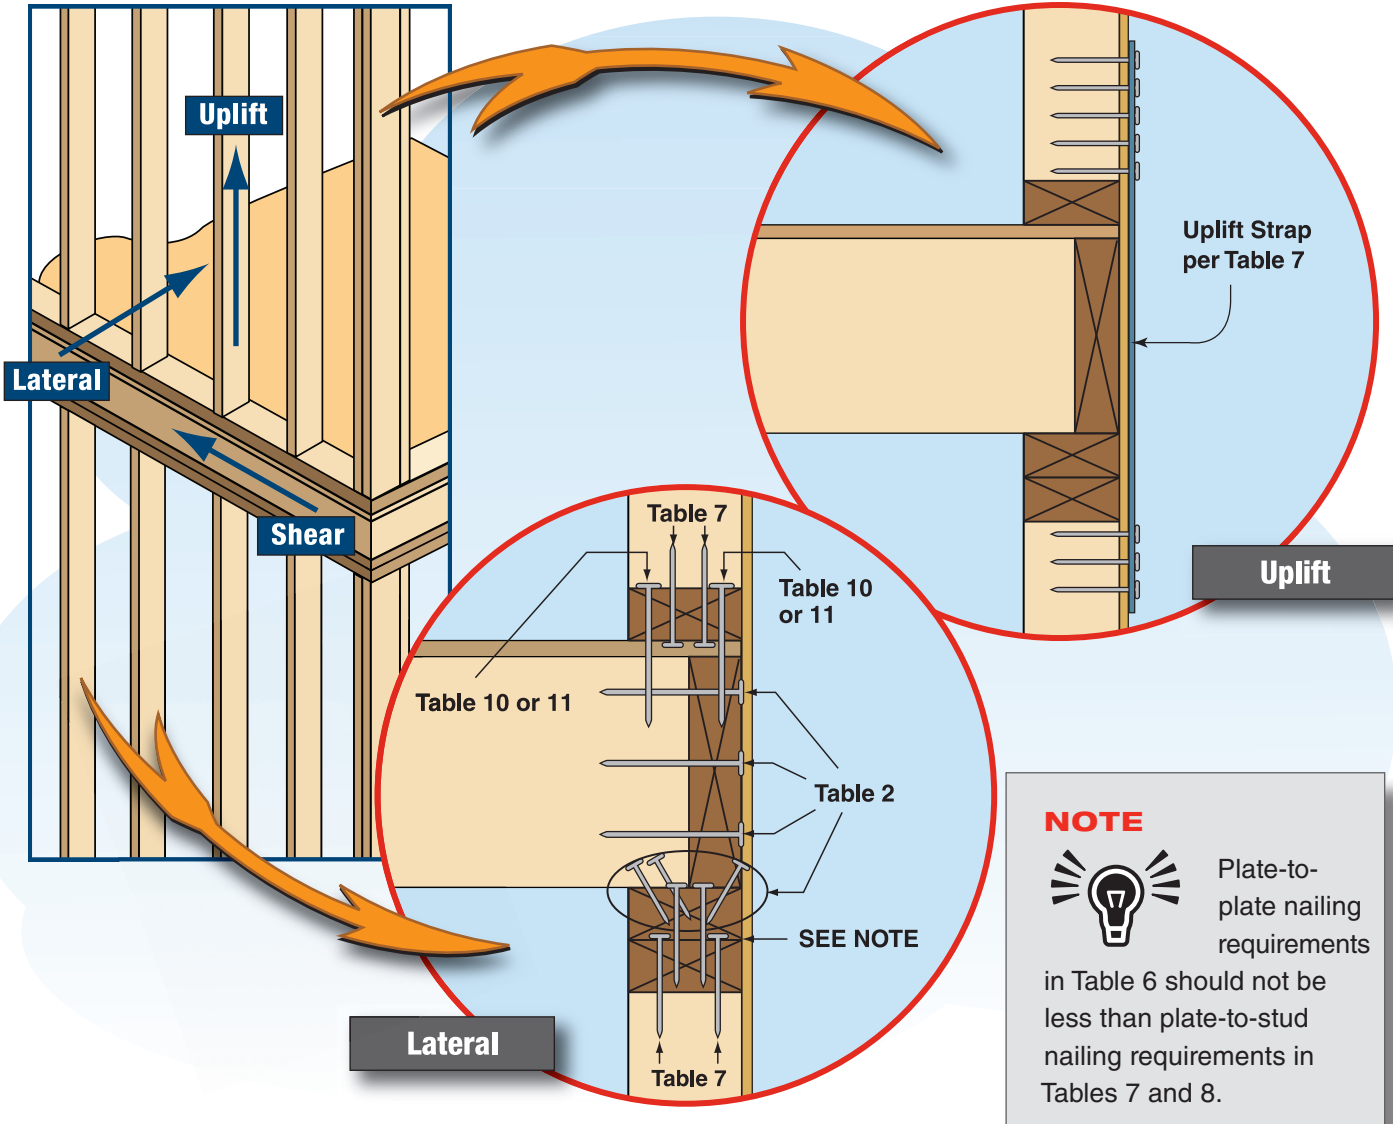


Figure 14. Story-to-Story Uplift and Lateral Connections

■ **Endwall Assemblies.** Rake overhang-to-wall, wall-to-wall, and wall-to-foundation connections shall be in accordance with the requirements given in Table 8 (See Figure 15). Walls which do not support the roof assembly and are attached in accordance with Table 2 need no additional uplift connections. Where gable end rake trusses are used (Figure 16), rake truss-to-stud connections shall resist the uplift and lateral loads provided by the truss designer. Where rake overhangs are framed with structural outlookers (Figure 17), provide rake overhang-to-wall, wall-to-wall and wall-to-foundation connections per the WFCM. Uplift forces for a 2 foot rake overhang framed with structural outlookers are provided in Table 9.

Table 8. Wall Connections for Endwall Assemblies

Stud Spacing	Uplift (lb)	Wall Height (ft.)						
		8	10	12	14	16	18	20
Plate-to-Stud - No. of 16d Common Nails – (Endnailed)								
12" o.c.	83	2	2	2	2	2	2	2
16" o.c.	111	2	2	2	2	2	2	2
24" o.c.	166	2	2	2	2	2	2	2



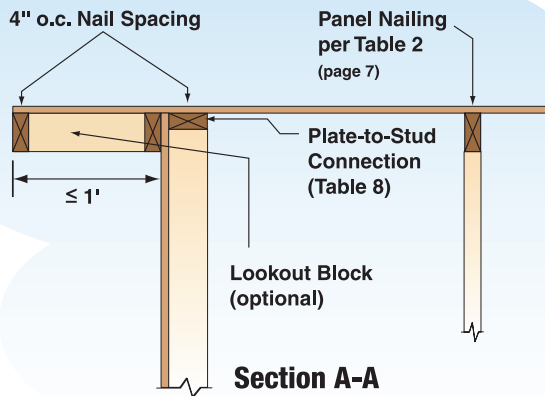
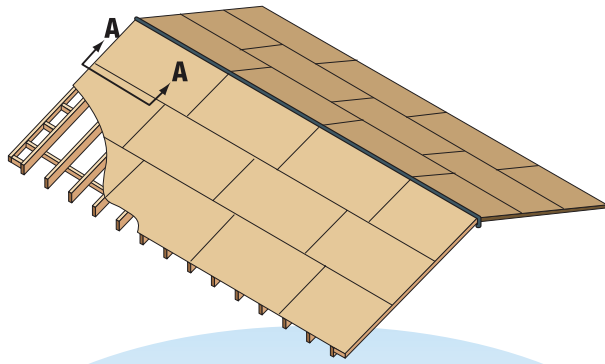


Figure 15. Rake Overhang Framed Without Structural Outlookers

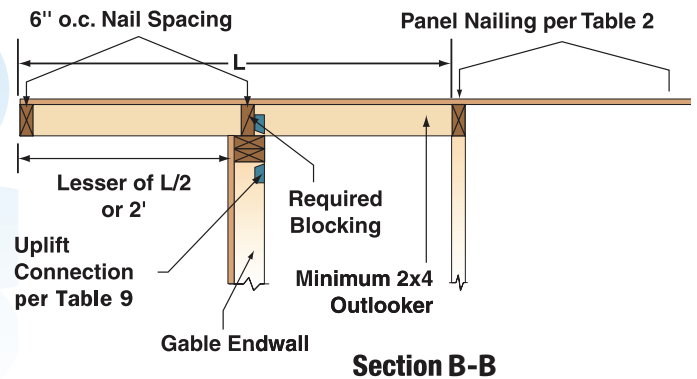
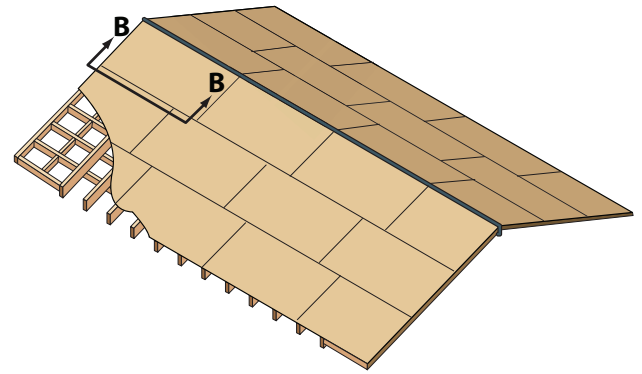


Figure 17. Rake Overhang Framed With Structural Outlookers

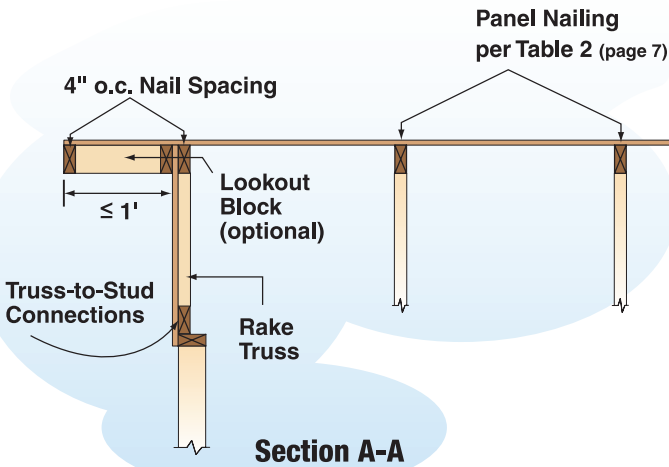


Figure 16. Rake Overhang Framed With Rake Truss

Table 9. Uplift Forces for Two Foot Rake Overhang Framed With Structural Outlookers

Outlooker Spacing	Outlooker Uplift (lb.)
12" o.c.	205
16" o.c.	273
24" o.c.	410

- Openings in Exterior Walls.** Openings in exterior walls shall be framed with #2 (min) grade lumber including Douglas-Fir-Larch, Hem-Fir, Southern Pine, and Spruce-Pine-Fir. Headers, full height studs; and, when wall openings do not extend to the floor below, sill plates; shall be provided (see Figure 18).
- Window Sill Plates Resisting Lateral Wind Loads.** Framing below openings in exterior walls that resist lateral wind loads only shall be per Table 10.
- Headers Resisting Wind Loads.** Framing above openings in exterior walls that resist uplift and lateral loads shall be per Table 11. Framing above openings in exterior walls that do not resist uplift loads is considered a window sill plate and sized to be per Table 10.

- **Full Height Wall Studs.** Full height studs shall be provided at each end of an exterior wall opening. The minimum number of full height studs at each end of the exterior wall opening shall not be less than half the total number of studs replaced by the opening in accordance with Tables 10 and 11. Full height studs shall meet the same requirements as wall studs specified in Table 5. Full height studs are permitted to replace an equivalent number of jack studs, when adequate gravity connections are provided.
- **Connections around Openings in Exterior Walls.**
  - **Window Sill Plate to Stud Connections.** Window sill plate to stud connections shall be in accordance with the requirements given in Table 10.
  - **Window Header to Stud Connections.** Window header to stud connections shall be in accordance with the requirements given in Table 11.
  - **Full Height Stud to Top and Bottom Plate Connections.** Full height stud assemblies supporting window sill plates shall be connected to top and bottom plates to resist the lateral loads specified in Table 10. Full height stud assemblies supporting headers shall be connected to top and bottom plates to resist the uplift and lateral loads specified in Table 11.
- **Headers Resisting Gravity Loads.** Framing above openings in exterior walls that resist gravity loads shall be in accordance with the governing building code.

Table 10. Window Sill Plates in Exterior Walls

Sill Plate Span (ft.)	Minimum Sill Plate Size (flat)	Requirements at Each End of Sill Plate			
		Number of Full-Height Studs			Lateral (lb.)
		12" o.c.	16" o.c.	24" o.c.	
2	1 - 2x4	1	1	1	87
3	1 - 2x4	2	2	1	130
4	1 - 2x4	2	2	1	173
5	1 - 2x4	3	3	2	217
6	1 - 2x4	3	3	2	260
7	1 - 2x6, 2 - 2x4	4	3	2	304
8	1 - 2x6, 2 - 2x4	4	3	2	347
9	1 - 2x6, 2 - 2x4	5	3	3	390
10	1 - 2x6, 2 - 2x4	5	4	3	434
11	2 - 2x6	6	4	3	477
12	2 - 2x6	6	5	3	520

### 4.3 EXTERIOR WALL SHEATHING

- **Exterior Wall Sheathing.** Exterior walls shall be sheathed with a minimum of 3/8" wood structural panel sheathing attached per Table 2 when studs are spaced 16" o.c. or less. Where studs are spaced greater than 16" o.c., 15/32" or greater wood structural panel sheathing shall be used, except 3/8" wood structural panel sheathing is permitted when applied with the strength axis perpendicular to framing. The minimum required percentage of full-height sheathing in the shear wall lines is provided in Tables 12 and 13. To meet the requirements for percentage full-height sheathing, full-height wall segment lengths shall not be less than 27-1/2" in an 8' wall, 31" in a 9' wall, or 34" in a 10' wall (aspect ratio  $\leq$  3-1/2:1). Exterior sheathing shall

Table 11. Headers in Loadbearing Exterior Walls

Header Span (ft.)	Minimum Header Size <sup>1</sup>	Requirements at Each End of Header				
		Number of Full-Height Studs			Uplift (lb.)	Lateral (lb.)
		12" o.c.	16" o.c.	24" o.c.		
2	2 - 2x4, 1 - 2x6	1	1	1	120	87
3	2 - 2x4, 1 - 2x6	2	2	1	180	130
4	2 - 2x6, 1 - 2x10	2	2	1	240	173
5	2 - 2x8	3	3	2	300	217
6	3 - 2x8, 3 - 2x12	3	3	2	360	260
7	4 - 2x10, 3 - 2x12	4	3	2	420	304
8	3.125x8.25 <sup>2</sup>	4	3	2	479	347
9	3.125x9.625 <sup>2</sup>	5	3	3	540	390
10	3.125x11 <sup>2</sup>	5	4	3	599	434
11	3.125x12.375 <sup>2</sup>	6	4	3	660	477

1 Header is sized to resist a 20 psf live load and a 20 psf dead load for a 40 SF/LF tributary area (36 foot building width two-foot overhangs). Uplift and lateral loads are from wind pressures.

2 Tabulated spans assume 20 F combination glulam with a minimum  $F_{bx} = 2,000$  psi,  $F_{vx} = 210$  psi and  $E = 1,500,000$  psi.

be continuous from the bottom plate to the upper top plate. All panel edges shall be located over framing.

- Hold Downs.** Hold downs with a capacity in accordance with Table 12 or 13 are required at each end of a shear wall line. When full height segments meet at a corner, a single hold down shall be permitted to be used to resist the overturning forces in both directions when sized to resist the larger load and the corner framing in the adjoining walls is fastened together to transfer the uplift load (See Figures 19a and 19b). A continuous load path must be maintained to the foundation. Where hold downs on a top floor align with hold downs on a lower floor, the combined capacity of the two hold downs must be resisted by anchorage to the foundation.

- Exterior Wall Cladding.** Exterior wall cladding shall be rated for a 115 mph Exposure B 3-second gust wind speed and be installed per the manufacturer's instructions.


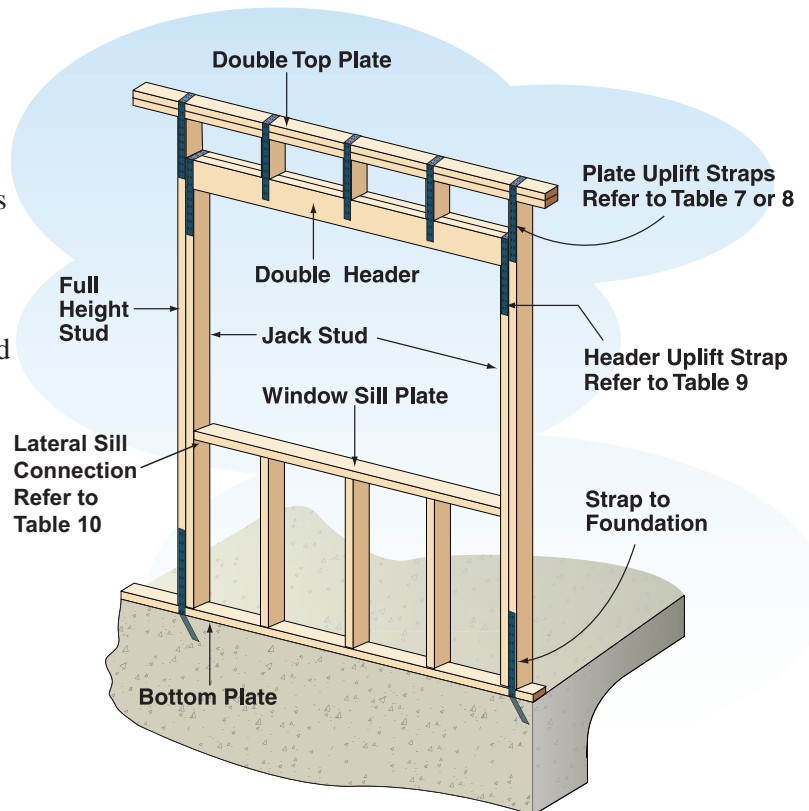


Figure 18. Framing Around Exterior Wall Openings



Table 12. Percentage of Full-Height Sheathing in Minimum Building Dimension (W)

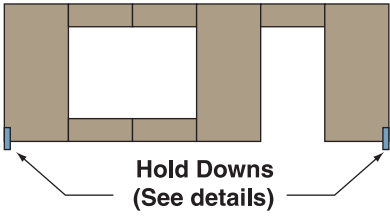

Hold Downs (See details)

Exterior Sheathing Type	Wood Structural Panel Sheathing (exterior wall sheathing per 4.3)		
	8d Common	8d Common	8d Common
Nail Type	8d Common	8d Common	8d Common
Edge Nail Spacing	6" o.c.	4" o.c.	3" o.c.
Field Nail Spacing	12" o.c.	12" o.c.	12" o.c.
Bottom Plate-to-Frame Shear Connection (16d Common Nails)	436 plf (3 / ft.)	590 plf (3 / ft.)	730 plf (4 / ft.)
Hold Down Capacity	4,360 lb.	5,900 lb.	7,300 lb.

Shear Wall Line Beneath	Building Aspect Ratio (L/W)	Percent Full-Height Sheathing on Each Exterior Wall Line		
<b>Roof and Ceiling</b> 	1.00	30%	23%	19%
	1.25	36%	28%	23%
	1.50	42%	32%	27%
	1.75	47%	37%	31%
	2.00	52%	41%	34%
	2.25	57%	45%	38%
	2.50	61%	49%	41%
	2.75	65%	52%	44%
<b>Roof, Ceiling, and One Floor</b> 	1.00	51%	40%	33%
	1.25	60%	47%	40%
	1.50	68%	54%	46%
	1.75	75%	61%	52%
	2.00	81%	66%	57%
	2.25	87%	72%	62%
	2.50	92%	77%	66%
	2.75	97%	81%	71%
	3.00	NP	85%	75%

NP= Not Permitted


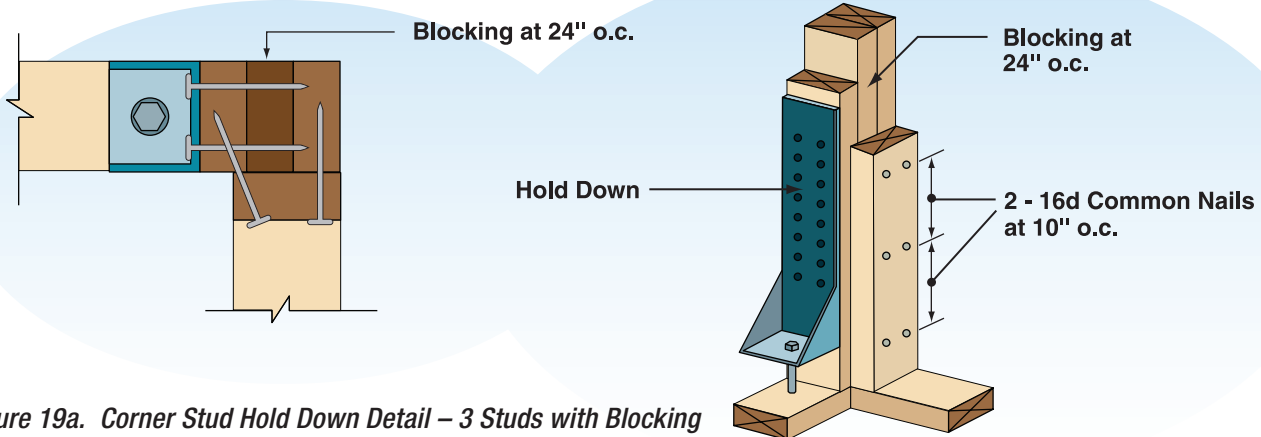


Figure 19a. Corner Stud Hold Down Detail – 3 Studs with Blocking



Table 13. Percentage of Full-Height Sheathing in Maximum Building Dimension (L)

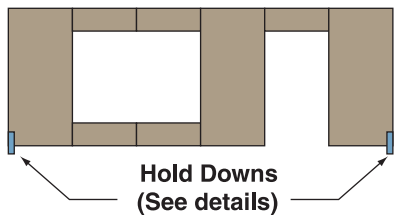

Hold Downs (See details)

Exterior Sheathing Type	Wood Structural Panel Sheathing (exterior wall sheathing per 4.3)		
	8d Common	8d Common	8d Common
Nail Type	8d Common	8d Common	8d Common
Edge Nail Spacing	6" o.c.	4" o.c.	3" o.c.
Field Nail Spacing	12" o.c.	12" o.c.	12" o.c.
Bottom Plate-to-Floor Shear Connection (16d Common Nails)	436 plf (3 / ft.)	590 plf (3 / ft.)	730 plf (4 / ft.)
Hold Down Capacity	4,360 lb.	5,900 lb.	7,300 lb.

Shear Wall Line Beneath	Building Aspect Ratio (L/W)	Percent Full-Height Sheathing on Each Exterior Wall Line		
<b>Roof and Ceiling</b> 	1.00	30%	23%	19%
	1.25	25%	19%	15%
	1.50	21%	16%	13%
	1.75	18%	14%	11%
	2.00	16%	12%	10%
	2.25	15%	11%	9%
	2.50	13%	10%	8%
	2.75	12%	9%	7%
	3.00	11%	8%	7%
<b>Roof, Ceiling, and One Floor</b> 	1.00	51%	40%	33%
	1.25	43%	33%	27%
	1.50	37%	28%	23%
	1.75	33%	25%	20%
	2.00	29%	22%	18%
	2.25	26%	20%	16%
	2.50	24%	18%	15%
	2.75	22%	17%	13%
	3.00	20%	15%	12%

NP= Not Permitted

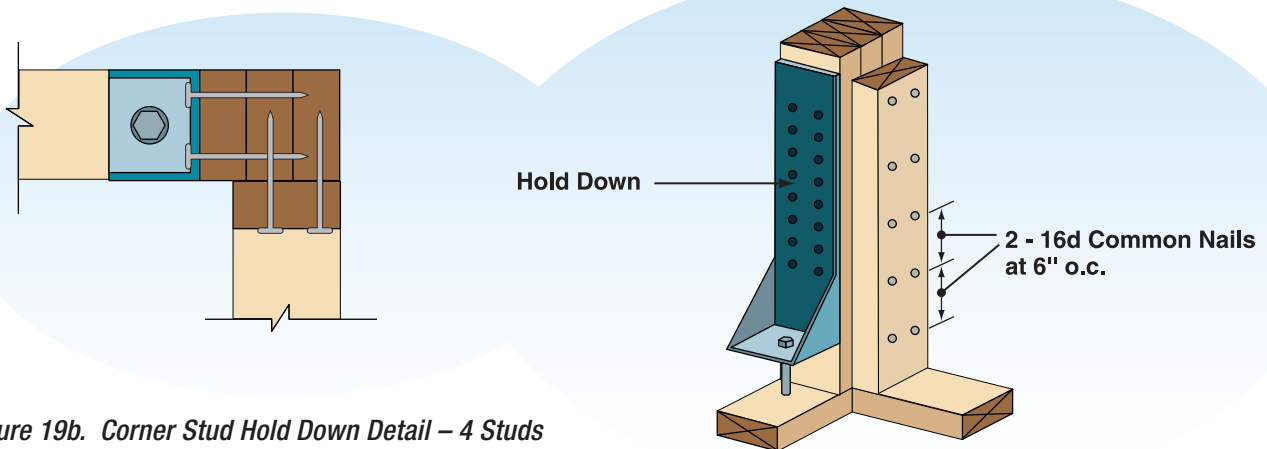


Figure 19b. Corner Stud Hold Down Detail – 4 Studs

# 5 Roofs

## 5.1 GENERAL

- **Framing Member Span.** Roof framing spans shall not exceed 36 feet (See Figure 20).
- **Roof Openings.** Roof openings shall not exceed the lesser of 12 feet or 50% of the building dimension (See Figure 6).
- **Roof Slope.** The roof slope shall not be greater than 12 in 12.
- **Location of Ceiling Joists/Rafter Ties.** Ceiling Joists and rafter ties shall be located within  $H_R/7.5$  of the top plate or the rafter span shall be reduced per the WFCM.

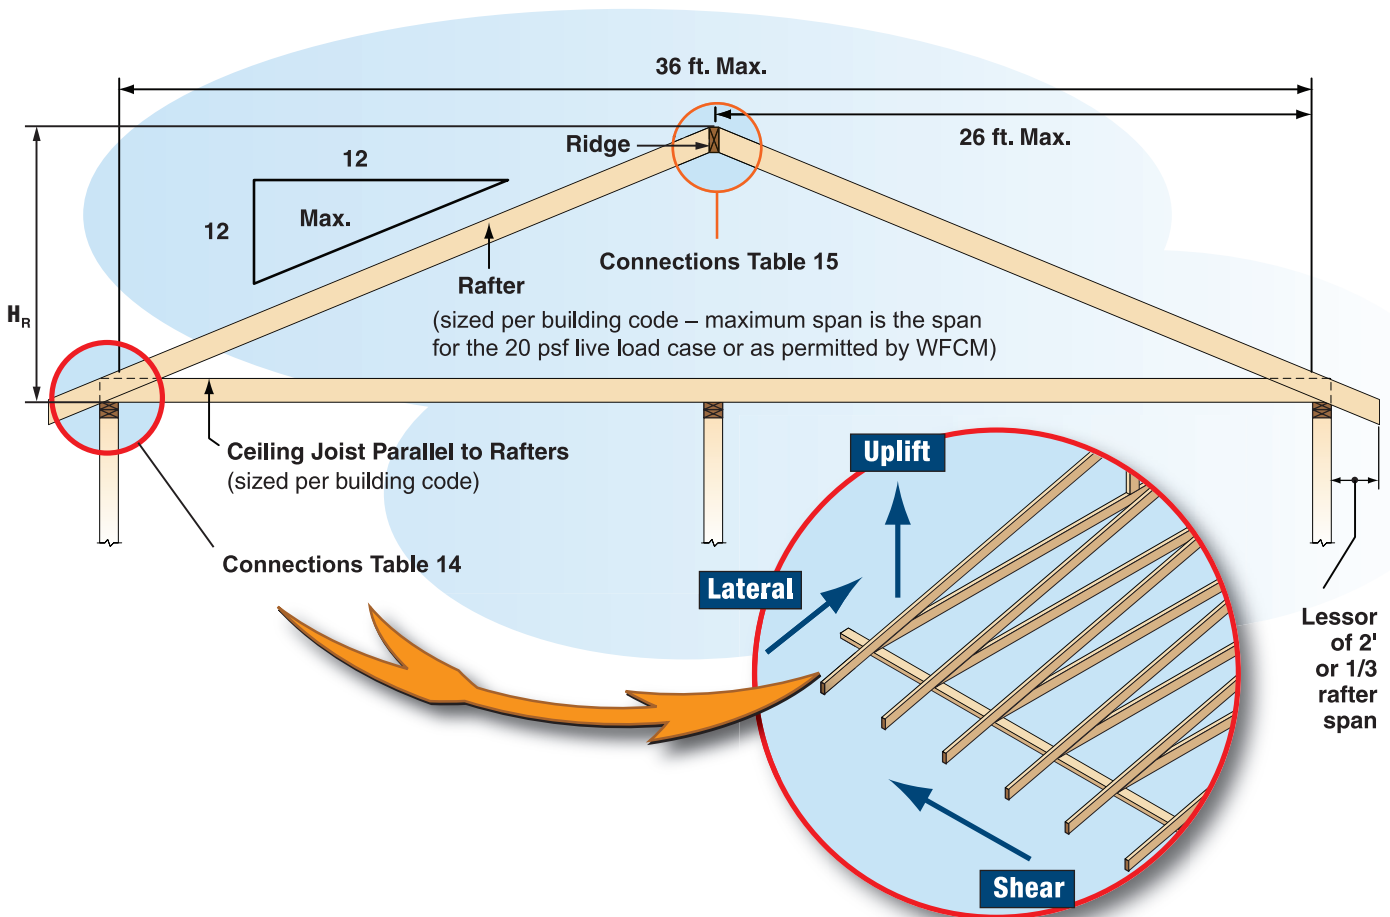


Figure 20. Roof Systems

## 5.2 WOOD RAFTER SYSTEMS

- **Rafters.** Rafters shall be sized in accordance with the governing building code. The maximum rafter span shall be limited to the span permitted for the 20 psf roof live load case, not to exceed 26 feet. Rafters shall be connected to exterior walls in accordance with Table 14.
- **Rafter Overhangs.** Rafter overhangs shall not exceed the lesser of one-third of the rafter span or 2 feet (See Figure 20).

■ **Rake Overhangs.**

- ❑ **Outlookers.** Where structural outlookers are used, the outlookers shall be constructed using 2x4 purlins connected in accordance with Table 9. Rake overhangs shall not be spaced more than 24" or exceed the lesser of one-half of the purlin length or 2 feet (See Figure 17).
- ❑ **Lookout Blocks.** Where non-structural lookout blocks are used, the rake overhang shall not exceed 1 foot (See Figures 15 and 16).

■ **Ridge Construction.**

- ❑ **Ridge Beam.** A ridge beam shall be installed at the roof peak. The ridge beam shall be in accordance with the governing building code. Rafters shall bear directly on the ridge beam or be supported by hangers or framing anchors. Each rafter shall be connected to the ridge beam or to an opposing rafter (See Figure 21) with a ridge strap in accordance with the requirements of Table 15. Ceiling joists or rafter ties are not required where a ridge beam is provided.
- ❑ **Ridge Board.** A ridge board shall be permitted to be substituted for a ridge beam when roof slopes equal or exceed 3 in 12. The ridge board shall be at least 1 inch nominal in thickness and not less than the depth of the cut end of the rafter. The rafters shall be placed directly opposite each other. Ceiling joists or rafter ties shall be used to provide a continuous tie between exterior walls. Ceiling joist or rafter tie to rafter connections shall be in accordance with the governing building code. Opposing rafters shall be connected at the ridge with ridge straps in accordance with the requirements in Table 15.
- ❑ **Collar Ties.** Ridge straps are not required when collar ties of nominal 1x6 or 2x4 lumber are located in the upper third of the attic space and attached to rafters using 5-10d nails at each end. For reduced requirements, see the *WFCM*.

■ **Ceiling Joists.** Ceiling joists shall be sized in accordance with the governing building code.

- ❑ **Open (Cathedral) Ceilings.** When ceiling joists and rafter ties are omitted and the rafters are used to create an open (cathedral) ceiling, rafter ends shall be supported on bearing walls, headers, and ridge beams. Rafters shall be attached to the wall assembly in accordance with Table 14 and attached to the ridge beam in accordance with Table 15.

Table 14. Truss, I-Joist, or Rafter Connections at Loadbearing Walls

Truss, I-Joist or Rafter Spacing	Roof Framing Span (ft.)							Lateral (lb.)	Shear (lb.)
	12	16	20	24	28	32	36		
	Uplift (lb.)								
12" o.c.	56	66	77	87	97	107	118	87	45
16" o.c.	75	88	103	116	129	143	157	116	60
19.2" o.c.	90	106	123	139	155	171	189	139	72
24" o.c.	112	132	154	174	194	214	236	174	90



Table 15. Ridge Strap Connections

Roof Span (ft.)	Roof Pitch				
	3:12	4:12	5:12	6:12	7:12-12:12
	Ridge Strap Connection Requirement (plf)				
12	91	77	60	55	55
16	121	102	80	74	73
20	152	128	100	92	92
24	182	153	119	111	110
28	212	179	139	129	129
32	243	204	159	148	147
36	273	230	179	166	165

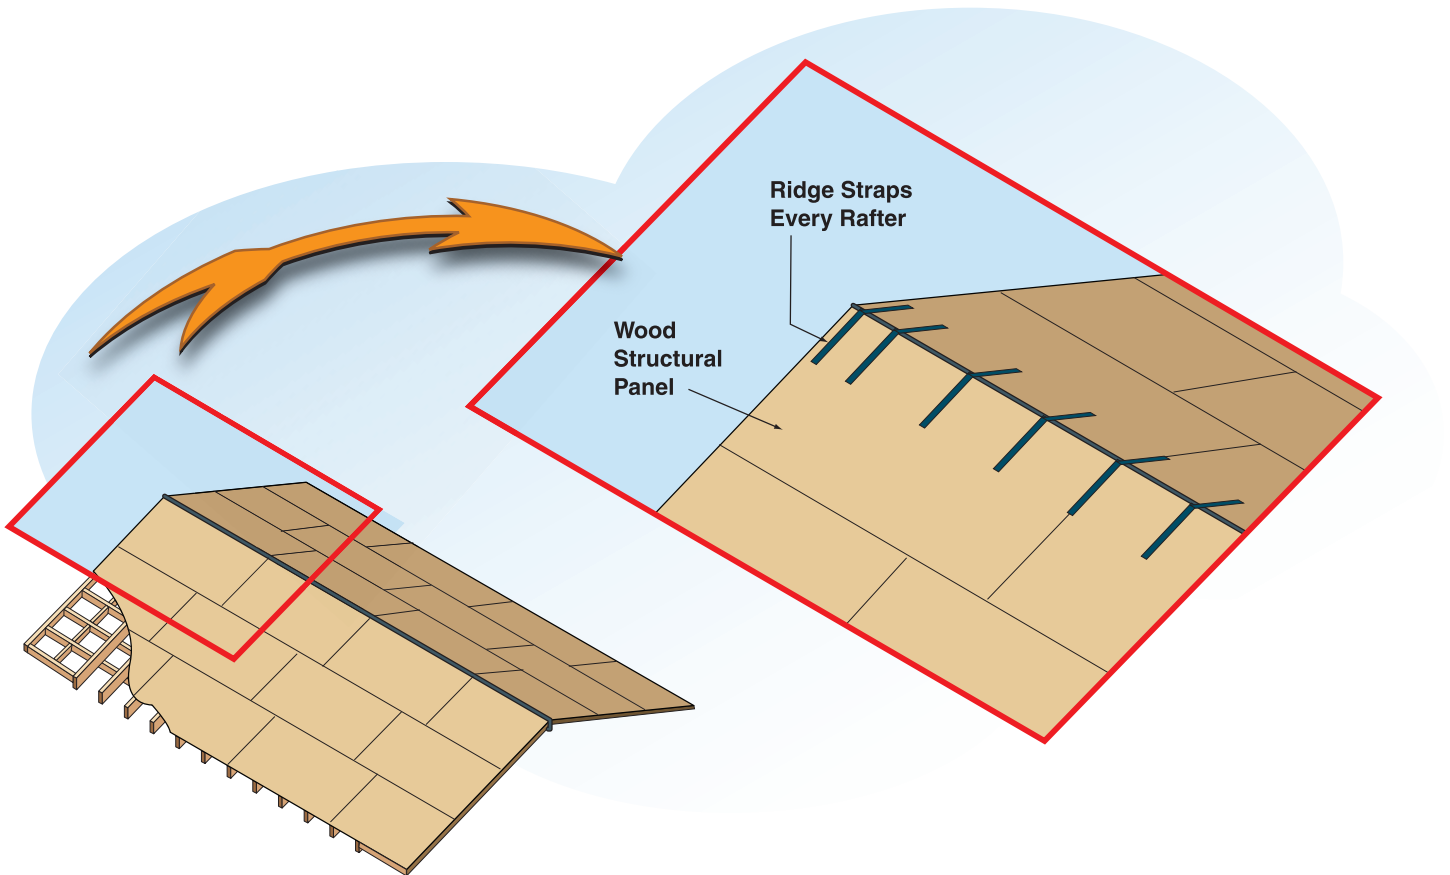


Figure 21. Ridge Strap Connection Detail



### 5.3 WOOD I-JOIST ROOF SYSTEMS

Wood I-joint roof systems shall comply with requirements set forth in the manufacturer's code evaluation report. I-joint roof framing members shall be connected to exterior walls in accordance with Table 14 and to the ridge beam in accordance with Table 15.

### 5.4 WOOD ROOF TRUSS SYSTEMS

Wood roof truss systems shall be designed, manufactured, and installed in accordance *ANSI/TPI 1 National Design Standard for Metal Plate Connected Wood Truss Construction*, the truss design drawings, and/or the manufacturer's code evaluation report. Roof trusses shall be connected to exterior walls in accordance with Table 14.

### 5.5 ROOF SHEATHING

Roofs shall be sheathed with a minimum of 3/8" wood structural panel sheathing and be attached in accordance with Table 2.

### 5.6 ROOF BRACING ENDWALL

Blocking and connections shall be provided at panel edges perpendicular to roof framing members in the first two truss or joist spaces. Blocking shall be spaced at a maximum of 4 feet on center. Nailing requirements are given in Table 2. See Figure 9.

- **EXCEPTION:** When an attic floor or ceiling diaphragm is used to brace the gable endwall or when a hip roof system is used, additional roof diaphragm blocking is not required.

# Glossary of Terms

The following definitions describe some of the terminology used in this Guide.

**Aspect Ratio.** The ratio of building length dimension (L) to the building width dimension (W).

**Blocking.** Wood member which provides edge support for sheathing or provides load path continuity such as below offset walls, offset floors, and between cantilever members.

**Bottom Plate.** A horizontal wood member attached to the bottom of a frame wall and connected to floor joists, girders, or other members.

**Cantilever.** The unsupported portion of a beam which extends beyond a support.

**Ceiling Joist.** A horizontal structural framing member which supports ceiling and/or attic loads.

**Cladding.** Exterior structural elements that receive loads normal to their surface.

**Continuous Load Path.** The interconnection of all framing elements of the lateral and vertical force resisting systems, which transfers lateral and vertical forces to the foundation.

**Endwall.** The exterior wall of a building perpendicular to the roof ridge and parallel to roof rafters or trusses.

**Floor Joist.** A horizontal structural framing member which supports floor loads.

**Foundation Wall.** The vertical structural wall unit attached to the foundation which supports vertical and lateral loads.

**Gable.** The triangular portion of the endwall beneath a dual-slope, pitched, or mono-slope roof.

**Header.** A beam used over wall or roof openings to carry loads across the opening.

**Hold Down.** A connector device used to provide overturning restraint by resisting uplift of the chords of shear walls. (See Figures 19a and 19b)

**I-Joist.** A structural member manufactured using sawn or structural composite lumber flanges and structural panel webs, bonded together with exterior exposure adhesives, forming an I' cross-sectional shape.

**Jack Rafter.** A rafter that spans from a hip or valley rafter or beam to a wall plate or ridge, respectively.

**Jack Studs.** A vertical structural element which does not span the full height of the wall and supports vertical loads.

**Mean Roof Height.** The distance from average grade to the average roof elevation (See Figure 2).

**Mono-slope Roof.** A roof with constant slope in one direction.

**Perforated Shear Wall.** A shear wall composed of shear wall segments with overturning restraint provided at each end of the shear wall, but which does not require special connections for force transfer around wall openings (See Tables 10-11).

**Pitched Roof.** A roof with one or more sloping surfaces.

**Rafter.** A horizontal or sloped structural framing member that supports roof loads (See Figure 20).

**Rafter Overhang (Eave).** The horizontal projection of a rafter measured from the outside face of the wall to the outside edge of the rafter.

**Rafter Tie.** A structural framing member located in the lower third of the attic space that ties rafters together to resist thrust from gravity loads on the roof.

**Rake Overhang.** The horizontal projection of the roof measured from the outside face of the gable endwall to the outside edge of the roof (See Figure 16).

**Ridge.** The horizontal line formed by the joining of the top edges of two sloping roof surfaces.

**Ridge Beam.** A structural member used at the ridge of a roof to support the ends of roof rafters and transfer roof loads to supports.

**Ridge Board.** A non-structural member used at the ridge of a roof to provide a common nailing surface and point of bearing for opposing roof rafters.

**Ridge Strap.** A metal connector that fastens opposing rafters together to resist roof suction loads at the ridge.

**Roof Span.** The distance between the outside of exterior walls supporting the roof/ceiling or truss assembly.

**Setback.** The offset distance of a wall on a floor system, measured from the support towards mid-span of the floor system.

**Shear Wall.** A vertical structural unit composed of one or more shear wall segments in one plane.

**Shear Wall Line.** Shear walls which are not offset by more than 4 feet horizontally from any other shear wall may be considered in the same shear wall line.

**Shear Wall Plan Offset.** The distance from a shear wall to the nearest parallel shear wall.

**Sheathing.** The structural covering used directly over framing members, such as studs, joists, or rafters, which transfers perpendicular loads to the framing material.

**Sill Plate.** A horizontal wood member anchored to the foundation and supporting floor joists.

**Slab-On-Grade.** The concrete slab that serves as the floor for the first story, upon which the first story framed walls are attached.

**Span.** The distance between face of supports, plus  $\frac{1}{2}$  the required bearing length at each end.

**Story.** The portion of a structure included between the upper surface of a floor and the upper surface of the floor or roof next above.

**Stud.** Vertical structural element of wall assemblies which transfers vertical and/or lateral loads.

**Top Plate(s).** A horizontal wood member(s) attached to the top of a frame wall and supporting trusses, I-joists, rafters, floor joists, ceiling joists, or other members.

**Truss.** An engineered structural component, assembled from wood members, metal connector plates, or other mechanical fasteners, designed to carry its own weight and superimposed design loads. The truss members form a semi-rigid structural framework and are assembled such that the members form triangles. Variations include metal web trusses, metal tube trusses, and plywood gusset trusses.

**Vertical Floor Offset.** The distance between two adjoining floor assemblies which do not lie in the same horizontal plane.

**Wind Exposure**

**Exposure B.** Urban and suburban areas, wooded areas, or other terrain with numerous closely spaced obstructions having the size of single family dwellings or larger. Exposure B shall be assumed unless the site meets the definition of another type exposure.

**Exposure C.** Open terrain with scattered obstructions including surface undulations or other irregularities having heights generally less than 30 feet extending more than 1500 feet from the building site in any full quadrant. Exposure C extends into adjacent Exposure B type terrain in the downwind direction for a distance of 1500 feet or 10 times the height of the building or structure, whichever is greater. This category includes open country and grasslands, and open water exposure of less than 1 mile.

**Exposure D.** Flat unobstructed areas exposed to wind flowing over open water for a distance of at least 1 mile. This exposure shall apply only to those buildings and other structures exposed to the wind coming from over the water. Exposure D extends inland from the shoreline a distance of 1500 feet or 10 times the height of the building or structure, whichever is greater.

**Window Sill Plate.** A horizontal framing member below an opening.

## Checklist

### 1.1 SCOPE

Wind Speed (3-second gust) ..... 115 mph \_\_\_\_\_  
 Wind Exposure Category ..... B \_\_\_\_\_

### 1.2 APPLICABILITY

Number of Stories ..... (Figure 2) ..... \_\_\_\_\_ stories ≤ 2 stories \_\_\_\_\_  
 Roof Pitch ..... (Figure 20) ..... \_\_\_\_\_ ≤ 12:12 \_\_\_\_\_  
 Mean Roof Height ..... (Figure 2) ..... \_\_\_\_\_ ft. ≤ 33' \_\_\_\_\_  
 Building Width, W ..... (Figure 4) ..... \_\_\_\_\_ ft. ≤ 80' \_\_\_\_\_  
 Building Length, L ..... (Figure 4) ..... \_\_\_\_\_ ft. ≤ 80' \_\_\_\_\_  
 Building Aspect Ratio (L/W) ..... (Figure 4) ..... \_\_\_\_\_ ≤ 3.0:1 \_\_\_\_\_

### 1.3 FRAMING CONNECTIONS

General compliance with framing connections? ..... (Table 2) ..... \_\_\_\_\_

### 2.1 ANCHORAGE TO FOUNDATION

Type of Foundation ..... (Figure 5) ..... \_\_\_\_\_  
 Foundation Anchorage  
     Proprietary Connectors  
         Uplift ..... (Table 3) ..... U = \_\_\_\_\_ plf \_\_\_\_\_  
         Lateral ..... (Table 3) ..... L = \_\_\_\_\_ plf \_\_\_\_\_  
         Shear ..... (Table 3) ..... S = \_\_\_\_\_ plf \_\_\_\_\_  
     5/8" Anchor Bolts  
         Bolt Spacing ..... (Table 4) ..... \_\_\_\_\_ in. \_\_\_\_\_  
         Bolt Embedment ..... (Figure 5) ..... \_\_\_\_\_ in. \_\_\_\_\_  
         Washer Size ..... (Figure 5) ..... \_\_\_\_\_ in. x \_\_\_\_\_ in. x \_\_\_\_\_ in. thick \_\_\_\_\_

### 3.1 FLOORS

Floor framing member spans checked? ..... (IRC or WFCM) ..... \_\_\_\_\_  
 Maximum Floor Opening Dimension ..... (Figure 6) ..... \_\_\_\_\_ ft. ≤ 12' \_\_\_\_\_  
 Maximum Floor Joist Setbacks  
     Supporting Loadbearing Walls or Shearwall ..... (Figure 7) ..... \_\_\_\_\_ ft. ≤ d \_\_\_\_\_  
 Maximum Cantilevered Floor Joists  
     Supporting Loadbearing Walls or Shearwall ..... (Figure 8) ..... \_\_\_\_\_ ft. ≤ d \_\_\_\_\_  
 Floor Bracing at Endwalls ..... (Figure 9) ..... \_\_\_\_\_  
 Floor Sheathing Type ..... (IRC or WFCM) ..... \_\_\_\_\_  
 Floor Sheathing Thickness ..... (IRC or WFCM) ..... \_\_\_\_\_ in. \_\_\_\_\_  
 Floor Sheathing Fastening ..... (Table 2) ..... \_\_\_\_\_

### 4.1 WALLS

Wall Height  
     Loadbearing Walls ..... (Figure 10) ..... \_\_\_\_\_ ft. ≤ 10' \_\_\_\_\_  
     Non-Loadbearing Walls ..... (Figure 10) ..... \_\_\_\_\_ ft. ≤ 20' \_\_\_\_\_  
 Wall Stud Spacing ..... (Figure 10) ..... \_\_\_\_\_ in. ≤ 24" o.c. \_\_\_\_\_  
 Wall Story Offsets ..... (Figures 7-8) ..... \_\_\_\_\_ in. ≤ d \_\_\_\_\_

### 4.2 EXTERIOR WALLS

Wood Studs  
     Loadbearing Walls ..... (Table 5) ..... 2x \_\_\_\_\_ - \_\_\_\_\_ ft. \_\_\_\_\_ in. \_\_\_\_\_  
     Non-Loadbearing Walls ..... (Table 5) ..... 2x \_\_\_\_\_ - \_\_\_\_\_ ft. \_\_\_\_\_ in. \_\_\_\_\_

115 MPH EXPOSURE B WIND ZONE

Bracing Gable End Walls  
 WSP Attic Floor Length ..... (Figure 11)..... \_\_\_ ft.  $\geq$  W/3 \_\_\_\_\_  
 Gypsum Ceiling Length..... (Figure 11)..... \_\_\_ ft.  $\geq$  0.9W \_\_\_\_\_

Double Top Plate  
 Splice Length ..... (Figure 13) ..... \_\_\_ ft. \_\_\_\_\_  
 Splice Connection (no. of 16d common nails) ..... (Table 6)..... \_\_\_\_\_

Loadbearing Wall Connections  
 Uplift. (proprietary connectors) ..... (Table 7)..... U = \_\_\_ lb. \_\_\_\_\_  
 Lateral (no. of 16d common nails) ..... (Table 7)..... \_\_\_\_\_

Non-Loadbearing Wall Connections  
 Uplift. (proprietary connectors) ..... (Table 8)..... U = \_\_\_ lb. \_\_\_\_\_  
 Lateral (no. of 16d common nails) ..... (Table 8)..... \_\_\_\_\_

Wall Openings  
 Header Spans ..... (Table 11) ..... \_\_\_ ft. \_\_\_ in.  $\leq$  11' \_\_\_\_\_  
 Sill Plate Spans ..... (Table 10) ..... \_\_\_ ft. \_\_\_ in.  $\leq$  12' \_\_\_\_\_  
 Full Height Studs (no. of studs) ..... (Tables 10 and 11)..... \_\_\_\_\_  
 Connections at each end of header or sill  
 Uplift. (proprietary connectors)..... (Table 11) ..... \_\_\_ lb. \_\_\_\_\_  
 Lateral (proprietary connectors)..... (Tables 10 and 11)..... \_\_\_ lb. \_\_\_\_\_

Wall Sheathing  
 Minimum Building Dimension, W  
 Sheathing Type ..... (Table 12)..... \_\_\_\_\_  
 Edge Nail Spacing ..... (Table 12)..... \_\_\_ in. \_\_\_\_\_  
 Field Nail Spacing..... (Table 12)..... \_\_\_ in. \_\_\_\_\_  
 Shear Connection (no. of 16d common nails) ..... (Table 12)..... \_\_\_\_\_  
 Hold Down Capacity ..... (Table 12)..... \_\_\_ lb. \_\_\_\_\_  
 Percent Full-Height Sheathing ..... (Table 12)..... \_\_\_% \_\_\_\_\_

Maximum Building Dimension, L  
 Sheathing Type ..... (Table 13)..... \_\_\_\_\_  
 Edge Nail Spacing ..... (Table 13)..... \_\_\_ in. \_\_\_\_\_  
 Field Nail Spacing..... (Table 13)..... \_\_\_ in. \_\_\_\_\_  
 Shear Connection (no. of 16d common nails) ..... (Table 13)..... \_\_\_\_\_  
 Hold Down Capacity ..... (Table 13)..... \_\_\_ lb. \_\_\_\_\_  
 Percent Full-Height Sheathing ..... (Table 13)..... \_\_\_% \_\_\_\_\_

Wall Cladding  
 Rated for Wind Speed? ..... \_\_\_\_\_

**5.1 ROOFS**

Roof framing member spans checked? ..... (IRC or WFCM)..... \_\_\_\_\_

Roof Overhang ..... (Figure 20) ..... \_\_\_ ft.  $\leq$  2' or L/3 \_\_\_\_\_

Truss, I-Joist, or Rafter Connections  
 Proprietary Connectors  
 Uplift..... (Table 12) ..... U = \_\_\_ lb. \_\_\_\_\_  
 Lateral..... (Table 12) ..... L = \_\_\_ lb. \_\_\_\_\_  
 Shear ..... (Table 12) ..... S = \_\_\_ lb. \_\_\_\_\_

Ridge Strap Connections – Tension ..... (Table 13) ..... T = \_\_\_ plf \_\_\_\_\_

Gable Rafter Outlooker..... (Figure 20) ..... \_\_\_ ft.  $\leq$  2' or L/2 \_\_\_\_\_

Outlooker Connections  
 Proprietary Connectors  
 Uplift..... (Table 14) ..... U = \_\_\_ lb. \_\_\_\_\_

Roof Sheathing Type ..... (IRC or WFCM)..... \_\_\_\_\_

Roof Sheathing Thickness..... \_\_\_ in.  $\geq$  3/8" wsp \_\_\_\_\_

Roof Sheathing Fastening ..... (Table 2)..... \_\_\_\_\_

# American Wood Council

## **AWC Mission Statement**

*To increase the use of wood by assuring the broad regulatory acceptance of wood products, developing design tools and guidelines for wood construction, and influencing the development of public policies affecting the use and manufacture of wood products.*

**American Wood Council**  
**222 Catoctin Circle, SE, Suite 201**  
**Leesburg, VA 20175**  
**[www.awc.org](http://www.awc.org)**  
**[info@awc.org](mailto:info@awc.org)**

